

# Axis<sup>AX</sup>

## Firefighter Phone System2 System Firefighter Phone Assemblies

The CAV-TEL2-MCCS and CAV-TEL2-MCCS/P are assemblies that include a firefighter phone, phone enclosure and interface module.

The difference between the CAV-TEL2-MCCS and CAV-TEL2-MCCS/P is that the CAV-TEL2-MCCS/P includes a push-to-talk firefighter phone. Both assemblies interface the Firefighter Phone System2 command center telephone with the Advanced CAV-TEL2-RISE riser module.

Both the Advanced C-CCM-01-ID2 (3x3 command center) and C-CCM-02-ID2 (3x5 command center) inner doors can support a CAV-TEL2-MCCS[/P] assembly, mounted in the bottom left side double aperture.



### Features

- Compatible with Axis AX Series Command Centers
- Class B Supervised Interface Wiring
- Up to Two (2) CAV-TEL2-MCCS[/P] per Riser Module
- Standard or Push-to-Talk integral phone


### Ratings

- All Circuits Power Limited
- Terminals support 12-22 AWG Wire

### Listings and Approvals

- CAN/ULC-S527-11 and CAN/ULC-S559-13 Listed: 100780709NYM-001

## Wiring Diagram

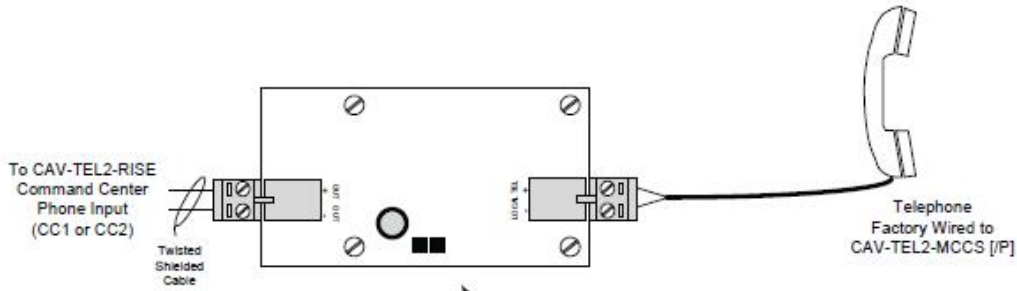

## Order Codes and Options

CAV-TEL2-MCCS	Command Center Firefighter Phone Assembly with Standard Phone
CAV-TEL2-MCCS/P	Command Center Firefighter Phone Assembly with Push-to-Talk (PTT) Phone

Check if this document is up to date | Give us feedback

9564 Yellowhead Trail NW, Edmonton AB, T5G 0W4, Canada T: 1 (866) 462-7100 E: info@harding-tech.com W: www.harding-tech.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.