

## 16-way Switch & 48 LED Card

The 16-way Switch & 48 LED Card is an expansion peripheral that offers 16 inputs and 48 outputs that can be configured via the Advanced PC Config Tool.


This additional PCB provides a cost effective solution to providing 16 individually programmable push buttons for controlling fire alarm equipment.

Up to 16 cards can be connected to an Axis EN series panel providing a maximum of 256 push buttons and 768 LED outputs.

Each LED output can be individually assigned to an output group to provide full support for dynamic zoning and to indicate when the buttons have been activated.

### Applications

Ideal for any application where a number of programmable push button switches are required for evacuation and plant control.

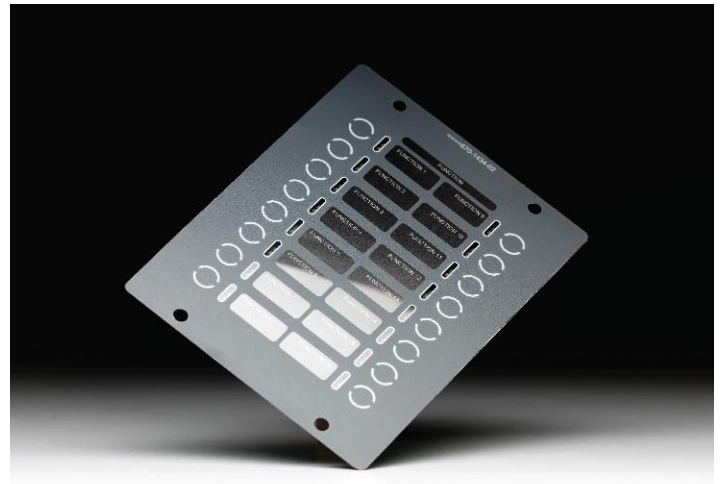

### Features

- 16 configurable push buttons
- 48 Programmable LEDs, 3 x LEDs per push button (red, green & yellow)
- Configurable buzzer
- Fast input response
- Up to 16 switch plates for each control panel

### Specification

|                         |  |
|-------------------------|--|
| Power supply            | 18-28V DC (e.g. wired from Panel 24V auxiliary supply) |
| Supply current          | 60mA maximum   |
| Temperature             | 0°C to 49°C indoor dry                                 |
| Humidity                | 10-95% humidity (non-condensing)                       |
| Dimensions H x W x D mm | 168 x 144 x 31   |
| Inputs                  | 16 x push buttons, 1 x PSU monitor                     |
| Outputs                 | 48 x LED indicators, 1 x buzzer                        |
| Fault Input             | Volt free  |

### Order Codes and Options

|          |  |
|----------|--|
| Mxp-538: | Switch / LED Interface. LED indicators arranged in groups of 3 (Green, Red and Yellow) |
|----------|--|

## Compatibility

Compatible with all Axis EN panels. Requires PC Config Tool version 6.10 or later. Requires panel software Mx-5000-050-07 or later

Units must be mounted locally to their power supply.

Up to 16 16-way Switch & 48 LED interfaces can be connected to the peripheral bus.

## Limitations

Each switch/push button can be configured using multiple input actions from the PC Net-003 software. Each LED output can be assigned to an individual output group and is fully programmable for any output function allowed within the Mx configuration program (v6 onwards).

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000, E: [enquiries@advancedco.com](mailto:enquiries@advancedco.com),  
W: [www.advancedco.com](http://www.advancedco.com)

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.