

## LED Modules

As a member of the Axis AX Switch LED Module family, the Advanced LED Modules consist of three (3) different types of modules that provide tremendous system annunciation and flexibility. Each module is fully compatible with the Axis AX Series Intelligent Fire Alarm Control Panels, "V" Series Integrated Audio Panels and Axis AX Command Center Panels. Each Axis AX Series panel can support up to sixteen (16) Axis AX Switch LED Modules in any combination.

The three (3) different types of LED Modules are the CAX-LED16RY, CAX-LED32R and CAX-LED32Y.


The CAX-LED16RY consists of sixteen (16) red and sixteen (16) yellow LEDs. These are typically used to annunciate the alarm and trouble status of up to 16 individual zones or areas.

The CAX-LED32R consists of thirty-two (32) red LEDs. These are typically used to annunciate the alarm status of up to 32 zones or areas.

The CAX-LED32Y consists of thirty-two (32) yellow LEDs. These are typically used to annunciate the trouble of up to 32 zones or areas.

In addition to the above mentioned zone or area annunciation, each LED can be mapped or assigned to any system function in support of fire alarm, system status, non-fire conditions, warnings or mass notification events. Each LED can also be further programmed for primary and secondary functions with flash rates based on last known status/event (off, on steady, 1/2 second flash or 1 second flash).

LED Modules can be installed in any available single aperture location of an Axis AX Series Intelligent Fire Alarm Control Panel, "V" Series Integrated Audio Panel or Axis AX Command Center Panel. In addition, LED Modules can be mounted remotely from the main fire alarm control panel in one of the Advanced attractive remote annunciation enclosures (CAX-LZA-CAB1, CAX-LZA-CAB2 or within a large selection of CAX-LOC enclosures).

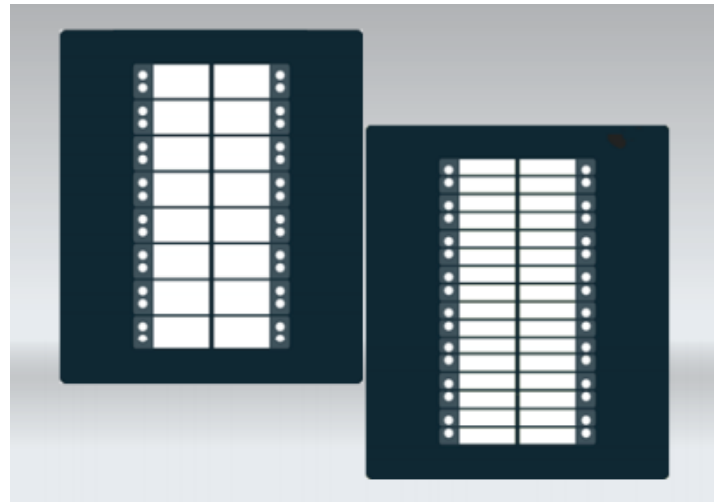


### Features

- Compact, Attractive Appearance
- Freely Programmable LEDs
- Up to 16 Modules per Axis AX FACP
- Field Programmable with PC-NeT Tool
- Communicates via PBUS (RS-485 Network)
- Local Axis AX FACP or Remote Mounting Options
- Simple DIP Switch Addressing
- Large Customer Slide-in Label Area
- Supervised External Trouble Input
- Configurable On-Board Piezo (Buzzer)
- Multi-Module Daisy Chaining

### Listings and Approvals

- ETL ANSI/UL 864 Listed: 101564744NYM-001

## Wiring Diagram

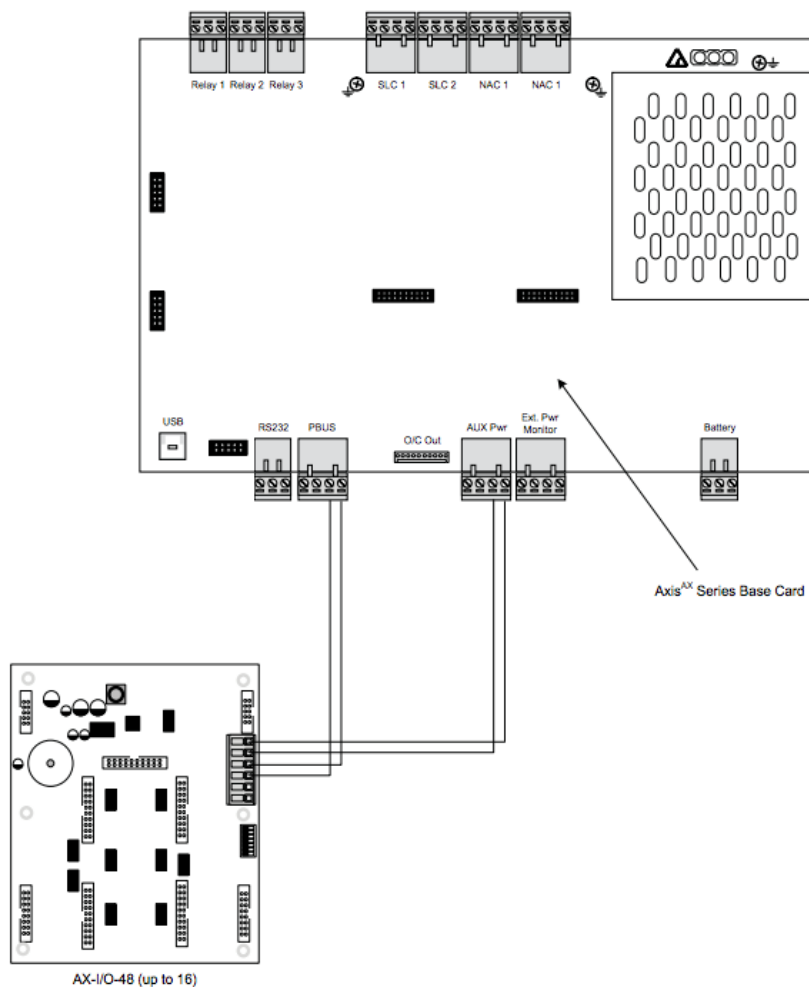

## Specification

Input Voltage (DC)	24 VDC (Operating range 18-28 VDC)
Operating Current	
Quiescent	15 mA
Active	
All LEDs Active (on)	41 mA
One LED (approximate)	0.8 mA
LED Indicators	
CAX-LED16RY	16 Red and 16 Yellow
CAX-LED32R	32 Red
CAX-LED32Y	32 Yellow
External Monitoring Input	Supervised Closed Contact
Piezo (Buzzer)	Field Configurable On/Off, Pulse/Steady
Screw Terminals	12 - 24 AWG
Daisy Chain Headers	10-Way IDC Ribbon Connector for Multi-Module Interconnect

## Order Codes and Options

CAX-LED16RY	LED Module Incorporating 16 Red and 16 Yellow LEDs
CAX-LED32R	LED Module Incorporating 32 Red LEDs
CAX-LED32Y	LED Module Incorporating 32 Yellow LEDs

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK **T:** +44 (0)345 894 7000, **E:** [enquiries@advancedco.com](mailto:enquiries@advancedco.com),  
**W:** [www.advancedco.com](http://www.advancedco.com)

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.