

## Intelligent Manual Pull Stations

Advanced Intelligent Manual Pull Stations (CAX-APS2) consist of a family of versatile, low profile, and high quality addressable manual pull stations. Available with either English or French labeling, the CAX-APS2 stations are easily recognizable during a fire situation. Constructed of rugged die-cast metal for long life and reliability the CAX-APS2 stations are painted with a high gloss red finish and raised white "FIRE" / "FEU" lettering. A red LED on the front of the station flashes during polling and turns on steady in alarm. Integrated into the station is a Form C relay output that activates when in alarm. All models are fitted with a common key-lock for resetting (CAT B/CAT 30) which is common with the panel key.

Available in either single (CAX-APS2-F1 / CAX-APS2-F1-F) or dual (CAX-APS2-F2 / CAX-APS2-F2-F) action configuration, the CAX-APS2 stations are designed to prevent false alarms when bumped, jarred or shaken. The dual action CAX-APS2-F2 further deters malicious false alarms by requiring a two-process function for activation; first push the "PUSH" / "POUSSER" bar inwards which then allows the "PULL" / "TIREZ" bar to be grasped and pulled outward.

Optional surface backboxes are available for indoor applications.

The Intelligent Manual Pull Stations are available in a variety of colors to meet various special application requirements. Colored stations do not include the raised white "FIRE" labeling, but are capable of accommodating labels for Alert, Alarm, Exit, Evac, etc. identification. Special applications can include; weather alert, door release, medical emergency, fire suppression activation and others.

### Operation:

The CAX-APS2 stations are operated by pulling the handle marked "PULL" / "TIREZ" on the front of the station as far down as it will go. At this point, the station will lock in place and is easily visible from up to 50 feet away. The activation handle is reset by opening the station with the reset key (keyed to match Axis AX Series Intelligent Fire Alarm Control Panels), returning the toggle switch to its "Normal" position, moving the handle to its upright position and relocking the station. On the CAX-APS2-F2 dual station model, the "PUSH" / "POUSSER" bar must be pushed inward prior to pulling the handle marked "PULL" / "TIREZ".



### Features

- Single or Dual Action
- Rugged Die-Cast Metal Construction
- Red Status LED
- Integrated Form C Relay Contact
- Low Profile, High Visibility Design
- Visual Indication of Activation including Red Status LED
- Surface or Semi-Flush Mountable
- Available in Special Application Colors
- Key-Lock for Reset


### Listings and Approvals

- CAN/ULC-S527-11 & CAN/ULC-S559-04 Listed: 100780709NYM-001
- CAN/ULC-S528-05



Install the AX-APS2 pull stations in accordance with local codes and regulations. To comply with the ADA requirements, locate the pull station on the wall as follows:

Front wheelchair access: < 48"  
Side wheelchair access: < 54"

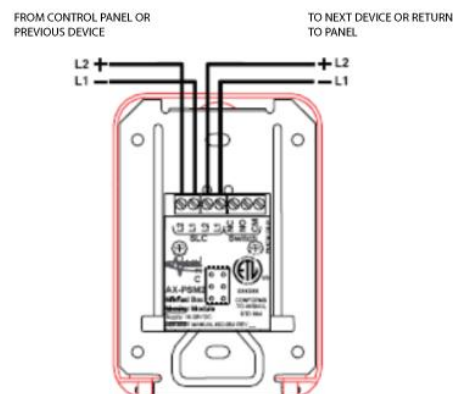

## Specification

|                            |                                                                         |
|----------------------------|-------------------------------------------------------------------------|
| Operating Voltage          | 17-28 VDC, with Communication Pulses 5-9 VDC                            |
| Operating Current          |                                                                         |
| Quiescent                  | 1.7 mA                                                                  |
| Alarm                      | 2.7 mA                                                                  |
| Operating Temperature      | 32 °F (0 °C) to 120 °F (49 °C), for Indoor Use Only                     |
| Dimensions                 | 4 3/4 " H x 3 1/4 " W x 1.1" D                                          |
| With Surface Mount Backbox | 4 3/4 " H x 3 1/4 " W x 2 1/4 " D (Cast or Sheet Metal)                 |
| Weight                     | 1.1 lb                                                                  |
| Analog Value               | 16 = Normal, 64 = Alarm, 4 = Trouble                                    |
| Address Range              | 1 - 126 (DIP Switch Programmable)                                       |
| Color                      | Red with Raised White Letters, White "PULL" Bar with Raised Red Letters |

## Order Codes and Options

|                 |                                                                      |
|-----------------|----------------------------------------------------------------------|
| CAX-APS2-F1     | Intelligent Manual Pull Station, Single Action (English)             |
| CAX-APS2-F1-F   | Intelligent Manual Pull Station, Single Action (French)              |
| CAX-APS2-F2     | Intelligent Manual Pull Station, Dual Action (English)               |
| CAX-APS2-F2-F   | Intelligent Manual Pull Station, Dual Action (French)                |
| <b>Options:</b> |                                                                      |
| AX-APS-BB1      | Interior Surface Mount Backbox - Red (Sheet Metal)                   |
| AX-APS-BB1-D    | Deep Interior Surface Backbox, Red                                   |
| AX-APS-GLS      | Package of Scored Plastic (Acrylic) Break rods (1 Dozen to a Packet) |

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000, E: [enquiries@advancedco.com](mailto:enquiries@advancedco.com),  
W: [www.advancedco.com](http://www.advancedco.com)

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.