


## Wireless Sounder Interface Module

The Wireless Sounder Interface Module is designed for use with the Axis range of modular wall sounders and sounder beacons. When either the conventional sounder or sounder beacon are fitted with this module, they become fully compatible with all Axis wireless translators and expander modules.

When configured onto a compatible translator, the wireless sounder or sounder beacon are fully addressable and benefit from an extensive range of intelligent control, test and monitoring functionality.

The well-proven adaptive radio signal processing algorithms ensure the highest levels of life safety and reliability.

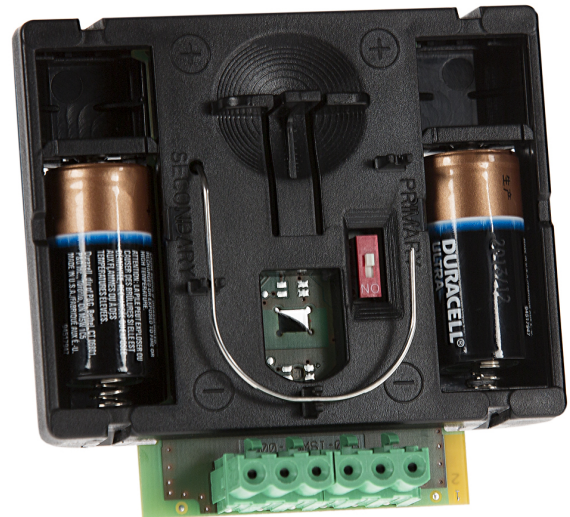

### Features

- Flexible modular design
- Approved to EN54-18 and EN54-25
- Bi-directional wireless communication
- Fits Axis modular wall sounders and sounder beacons
- Microphone self-test facility
- Utilises standard low-cost lithium battery technology
- Self-optimising wireless communication

### Standards and Approvals

- EN54-18: Input/output devices
- EN54-25: Components using radio links and system requirements

### Specification

Operating frequency range	868 MHz - 870 MHz
Maximum radiated power	5dBm (3mW)
Radio signal's modulation type	FSK
Operating frequency channels	7
Communication range	Up to 150m (in open space)
Primary and secondary batteries	CR123A (3V & 1.2Ah)
Weight (without batteries)	110g
Operating temperature (no icing)	-10°C to +55°C

### Order Codes and Options

Axis-RWSM	Wireless Sounder Interface Module
-----------	-----------------------------------

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle, NE12 8EW, UK T: +44 (0)845 894 7000, E: [enquiries@advancedco.com](mailto:enquiries@advancedco.com), W: [www.advancedco.com](http://www.advancedco.com)

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.