

50 Way Network I/O


The 50 Way Network I/O provides a convenient and cost effective solution where multiple inputs and outputs are required. It is ideally suited for building control functions such as damper/fan control or sprinkler control where on/off/auto control and healthy/fault or open/closed status indication is required.

The inputs can be configured as toggle (switch) or momentary (push-button) types. The outputs are fully programmable using the powerful dynamic cause and effects rules for output groups 1-50.

In addition to the 50 I/O circuits, dedicated inputs and outputs are also provided. Status outputs include General Fire, Fault, Disablement and Test. A buzzer is also provided for audible annunciation of status changes. Inputs include buzzer mute, momentary input enables/reset and LED test.

The 50-Way Network I/O controller is a stand-alone unit with/without its own EN54-4 power supply and charger. Each input and output on the card is fully programmable using a PC.

An additional 100 LED outputs can be provided using the 100-way driver card – output groups 101-200.

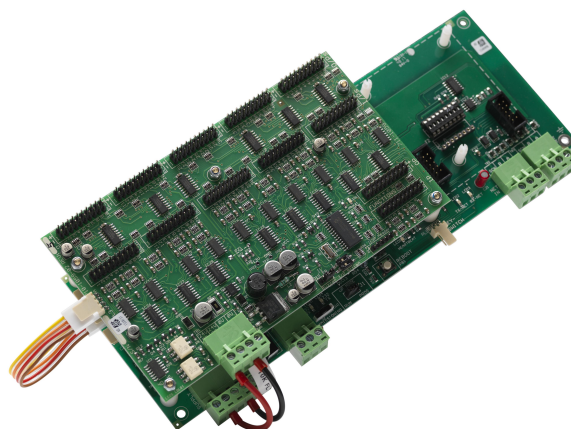

Features

- Over 50 programmable volt free switch/push button type inputs, easily configured via our PC-NET-003 configuration software.
- Over 50 programmable LED driver outputs for energising and providing LED indication.
- Large full colour graphical indication for site maps, building layouts or simply zonal indication.
- Remote location by simply adding the type of mimic interface onto the Ad-net/Ad-net+ Network.
- Supplementary graphical indication
- Zonal or fully programmable LED option
- Fully networkable
- 3 year warranty as standard

Specification

AC Supply (Boxed Versions)	220-240V AC (+10-15%) 50-60Hz 1.6A. Support for up to 2 x 12V 7Ah batteries
DC Supply (PCB) @ 24V DC	18-28V DC 63mA (/FT 101mA) + 0.8mA per LED energised + 1.3mA per switch energised
Output Drive Circuit (56)	3.3V 4mA current limited (for direct LED connection)
Input Circuit (58)	Volt free, dry-contact inputs

Order Codes and Options

Mxp-045*(/FT):	50-Way Network I/O Controller (unboxed)
Mxs-031-2T:	2 position trapped key switch for Mxp-045
Mxs-031-2U:	2 Position un-trapped key switch for Mxp-045
Mxs-031-3U:	3 Position un-trapped key switch for Mxp-045
Mxs-026(F):	High intensity LED (Red/Green/Yellow - Fitted)
Mxp-052(DIN):	Mimic driven 10-way relay card

/FT:	Denotes fault tolerant version
------	--------------------------------

Compatibility

The 50 Way Network I/O is compatible with all Axis EN control panels from software revision 019-04 using the Ad-Net peer-to-peer network. The 50 Way Network I/O is programmable using the Pc-NeT-03 Mx configuration tool from revision 4.19 onwards.

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK **T:** +44 (0)345 894 7000 **E:** enquiries@advancedco.com
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.