

Conventional Remote Indicator

The conventional remote indicator can be connected to the Axis EN detector base to provide the remote indicator functionality.


The typical application is for outside rooms fitted with fire detection or below loft or voice areas fitted with AFD devices.

Features

- Low profile design
- Red indicator
- Compatible with the full range of Axis EN wired fire detectors with remote alarm indicators (conventional and intelligent)
- No programming required

Standards and approvals

- EN 50130-4:2011
- EN 61000-6-3:2017 +A1:2011
- EN 50130-4:2011 +A1:2014
- EN IEC 63000:2018

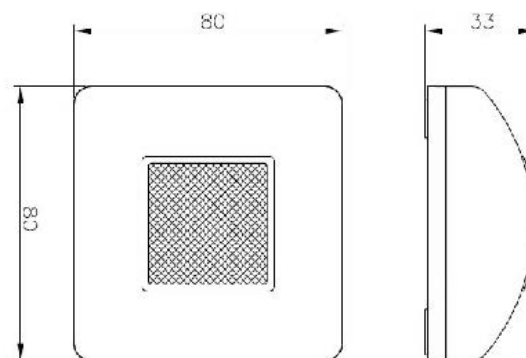

Specification

Operating voltage	15 VDC - 40 VDC
Average current	4.5mA @ 24 VDC
Dimensions	80 mm x 80 mm x 27 mm
Weight	30 g
Cable size	0.5 - 2.5 mm ²
Operating temperature (no icing)	-10°C to +55°C
Max humidity (non condensing)	95% RH
IP rating	42

Order Codes and Options

20-FI100-ADV	Conventional Remote Indicator
--------------	-------------------------------