
# Intrinsically Safe Wireless Heat Detector - obsolete

The Intrinsically Safe Wireless Optical Heat Detector is a fully intelligent device which is compatible with all our Wireless Translator and Expander Modules and has been approved for use in Category 1, 2 or 3 hazardous atmospheres. Its fully wireless capability means it requires no special wiring or barriers, making installation quick, safe and cost effective.

Our wireless detectors are third party approved to relevant EN54 standards and utilise the latest cutting-edge technologies and features. The well-proven adaptive radio signal processing algorithms combined with the latest detector design ensure the highest levels of life safety and system reliability.



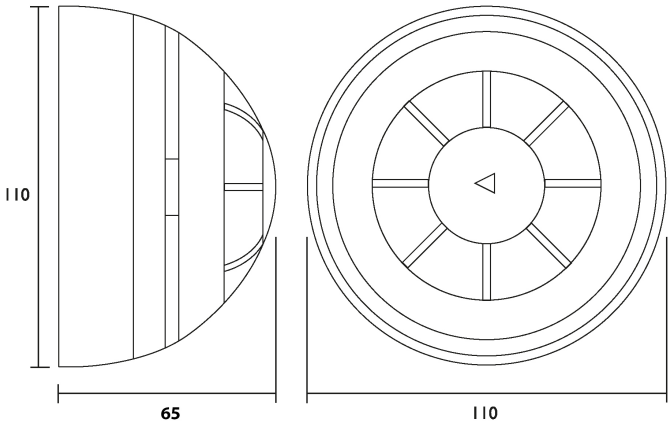


## Features

- ATEX & IECEx Type Approved
- ATEX Code: Ex II 1G
- Bi-directional wireless communication
- Certified to EN54
- Up to 3 year battery life
- Uses standard low-cost lithium battery
- Quick and safe installation


## Standards and approvals

- EN54-5: Heat Detectors
- EN54-25: Components using radio links and system requirements

## Specification

| | |
|---|---|
| Operating Frequency Range | 868 - 870 MHz |
| Maximum Radiated Power | 5dBm (3mW) |
| Operating Frequency Channels | 7 |
| Transmission Message Interval | 60 seconds |
| Dimensions | 110mm x 65mm |
| Primary Battery | CR123A (3V & 1.2Ah) |
| Secondary Battery | CR2032A (3V & 0.24Ah) |
| Operating Temperature (no icing) | -10° to +55°C |
| Maximum Humidity (non condensing) | 95% RH |
| Weight (without batteries) | 190g |
| IP Rating | IP40 |

## Order Codes and Options

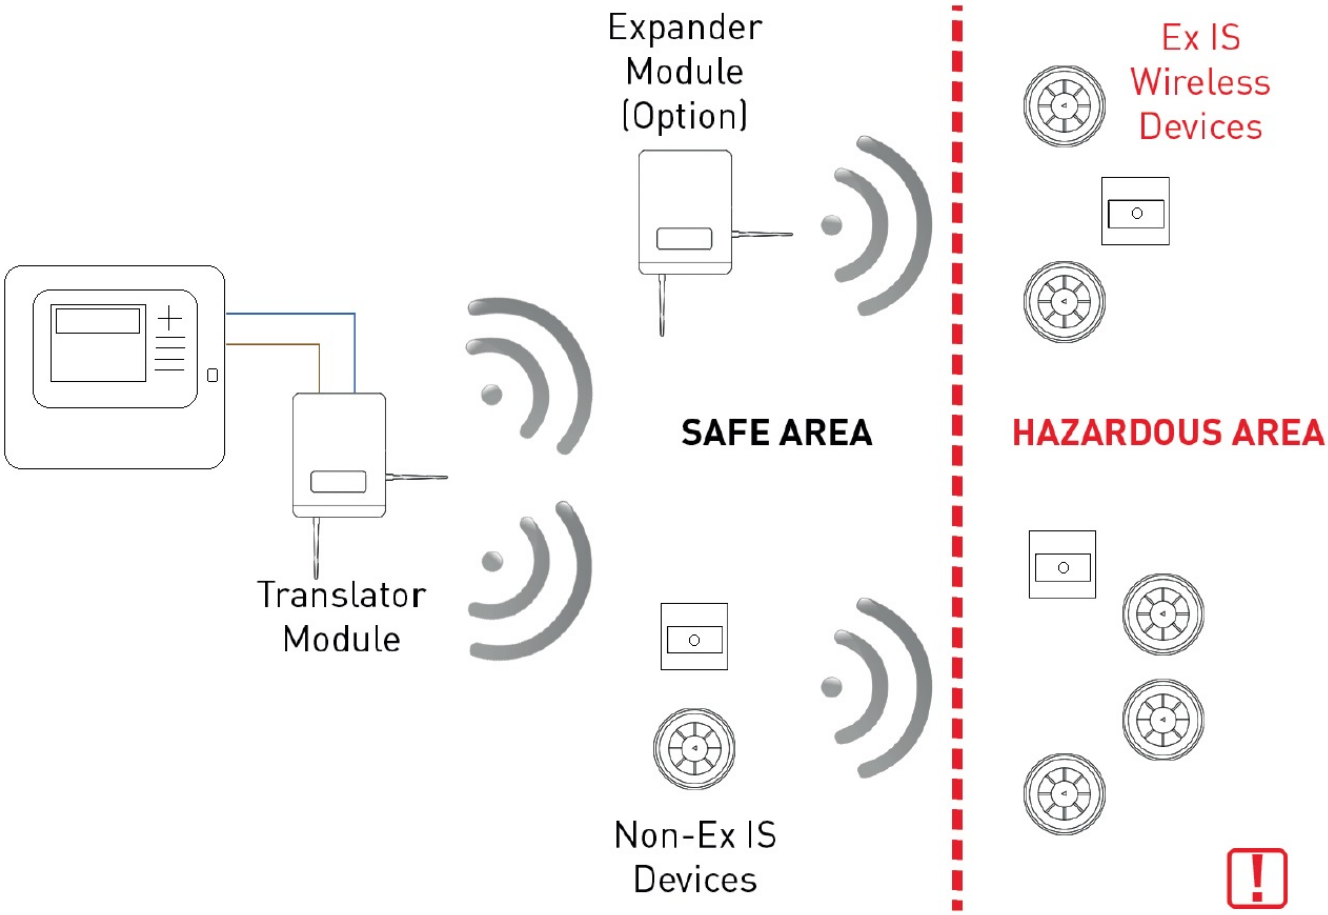


Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000 E: enquiries@advancedco.com
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.