

Sounder Booster Card

The Sounder Booster is a peripheral unit that utilises a standard sounder circuit (panel or loop driven), and provides increased sounder output capability.


This boosted output is fully monitored for open and short circuits and will take an independent supply to provide up to 4A of sounder current to a single circuit.

On-board indication via 2 LED indicators located on the booster PCB enable the user to view when an output has been triggered and when an external power supply has been connected.

Applications / Limitations

The sounder booster is used where a single sounder output circuit of up to 4A is required.

Each of the panel's sounder outputs can only monitor a single circuit. The unit must therefore be situated at the end of the panel's sounder output circuit to maintain correct fault monitoring.

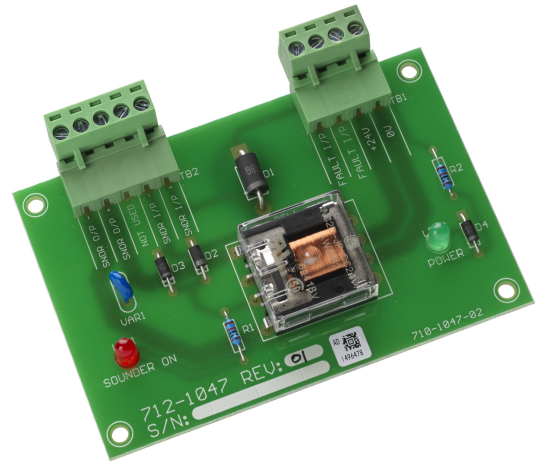

Features

- Increased sounder capability up to 4A
- On-board indication
- PSU fault input contacts
- Cost effective against ancillary hardware
- 3 year warranty as standard

Specification

Sounder Input	“SNDR I/P+” and “SNDR I/P-” connect to the input trigger (panel sounder output circuit) 1 monitored sounder circuit (total maximum load = 4A)
On board indication	1 red sounder LED. LED illuminates when the output is triggered. 1 green power LED. LED illuminates when an external supply is connected.
On board indication	Input: 230V AC 50Hz Output: 5 Amp EN54 power supply. Nominal output voltage = 27.3V DC
Current Consumption	Quiescent: 0mA Driving: 17mA (Derived from sounder circuit I/P)
Dimensions H x W x D mm	PCB only: 70 x 105 x 18

Order Codes and Options

Mxs-025:	4A Sounder Booster Card (requires a minimum 4 Amp power supply and enclosure)
----------	---

Compatibility

The Sounder Booster Card is compatible with all Axis EN control panels.

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK **T:** +44 (0)345 894 7000, **E:** enquiries@advancedco.com,
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.