

## Standalone Isolator Module



The standalone isolator module provides short circuit isolation for analogue-intelligent loops.

### Features

- Designed to operate with Axis EN control panels
- Provides short circuit isolation for analogue-intelligent loops
- Passive device, does not need to be addressed
- Isolates the adjacent loop section where the short circuit occurs
- Restores power to the isolated loop section when short circuit is removed
- Complies with EN 54-17

### Standards and Approvals

- EN54-17:2005

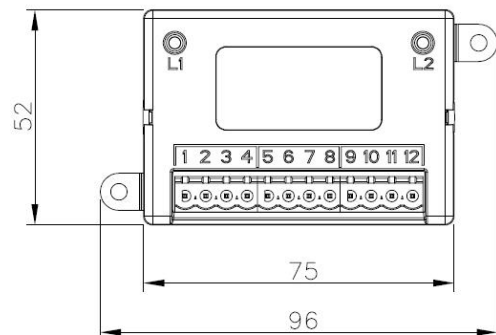

### Specifications

|                                     |                 |
|-------------------------------------|-----------------|
| Loop Voltage Range                  | 15 - 40 Vdc     |
| Quiescent Current Consumption       | 90 $\mu$ A      |
| Operating Temperature Range         | -30°C to +70°C  |
| Humidity (non condensing)           | 5% to 85% RH    |
| Dimensions L x H x D (w/o brackets) | 75 x 52 x 28 mm |
| Weight                              | 40g             |
| IP rating                           | 21C             |

### Order Codes and Options

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK **T:** +44 (0)345 894 7000 **E:** [enquiries@advancedco.com](mailto:enquiries@advancedco.com)  
**W:** [www.advancedco.com](http://www.advancedco.com)

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.