

## Exi-LED

The Exi-LED exit sign is a reliable, attractive product that offers excellent performance with long life and low energy benefits. It's slim but robust welded steel housing, available in a selection of finishes, provides a 'picture frame' appearance around the brightly lit exit legend. These legends are available with a choice of directions and formats (European or ISO). Although smaller than conventional fluorescent exit signs, the Exi-LED still provides a useful 25-metre viewing distance, in both mains and emergency modes with 15 high brightness white LEDs and state of the art reflector. The Exi-LED fully supports all features of the Lux Intelligent test system and complies with all the relevant requirements of EN60598.2.22.

### Operation

The Exi-LED panel features matrix dot coating to ensure the LEDs evenly illuminate the safety sign legend. Standard luminaires are supplied with integral maintained emergency control gear, which in the event of a power failure, will ensure the exit sign continues to operate with the same sign luminance for 3 Hours from the internal NiMH battery.

### Installation

The Exi-LED mounts on the wall using simple keyhole slots or via the central BESA entry. The front cover simply hooks onto the back plate and is retained with a single fixture located centrally on the base.



### Features

- Fully compatible with Lux Intelligent test system
- Long life and low energy performance
- Sleek stylish design
- Fully complies with all aspects of EN60598.2.22

## Specification

Operation	Maintained 3 hour
Light Source	15 Long life white LEDs
Battery	2.4V 2.0Ah NiMH
Input Voltage	230V +/-10% 50Hz
Charge Current	100mA Nominal
Recharge Period	24 Hours (14 hours for 1-hour duration)
Power	10VA
IP Rating	IP20
Weight	1.7Kg
Cable Entry	Central rear BESA entry

## Order Codes and Options

ELED/M3/P:	Exi-LED wall mounted 3 hour exit sign with white finish
ELED/M3/P/SG:	Exi-LED wall mounted 3 hour exit with textured silver/grey finish
ELED/M3/P/WH:	Exi-LED wall mounted 3 hour exit with textured white finish

## More Information

### Legends

The standard Exi-LED is supplied with ISO format exit legends. Unless stated, the luminaire will be supplied with the Arrow Down direction. For other variants, the following codes should be added to the full product code:

/AR Arrow Right

/AL Arrow Left

/AU Arrow Up

The legends are also available in the EC Signs Directive and should be ordered with the following codes appended.


/ECAD EC Format, Arrow Down

/ECAR EC Format, Arrow Right

/ECAL EC Format, Arrow Left

/ECAU EC Format, Arrow Up

### Dimensions

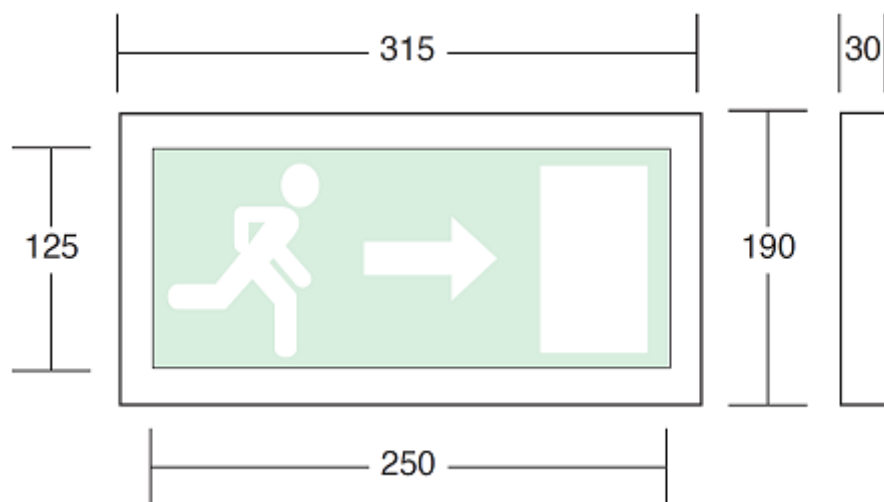

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle, NE12 8EW, UK T: +44 (0)1670 707 111, E: [enquiries@luxintelligent.com](mailto:enquiries@luxintelligent.com), W: [www.luxintelligent.com](http://www.luxintelligent.com)

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.