

Exi-Lite

The Exi-Lite is a robust exit direction luminaire. The design of the luminaire provides viewing distances of 36 Metres, whilst the high 180 Lumens output ensures good visibility. The standard luminaire is supplied in a white epoxy coated steel enclosure, coming complete with a printed opal polycarbonate legend. The luminaire also provides good visibility with the addition an opal panel across the bottom of the luminaire ensuring maximum light levels in the event of an emergency.

More decorative finishes are available in both chrome and brass, whilst the exit legends are available in both EC and ISO formats.



Operation

The Exi-Lite is available in maintained and non-maintained versions, providing a full three hours of operation in the event of the local lighting circuit failing. The luminaire can be supplied in other supply voltage variations and is also suitable for use with hold off relays.

Installation

The Exi-Lite comes with a back BESA entry on the single sided and on the top on the double sided variants. The luminaire fully complies with the requirements of EN60598.2.22 and supports all the features of the Lux Intelligent emergency lighting testing panels.

Features

- Excellent 36-metre viewing distances
- Robust design with a choice of superior finishes
- Fully complies with EN60598.2.22
- Supports all the features of the Lux Intelligent range of testing panels

Specification

| | |
|-----------------|---|
| Supply Voltage | 230 Volts (220-240V) @ 50Hz |
| Supply Current | Maintained:90mA Non-maintained:40mA |
| Lamp | 8W T5 |
| Battery | 3.6V 4AHr NiCd (nominal charge current 250mA) |
| Recharge Period | 24 Hours (14 hours for 1-hour duration) |
| Cable Entry | Back BESA entry |
| IP Rating | IP20 |
| Construction | Epoxy coated galvanised steel with polycarbonate legend |
| Weight | 2.5Kg |
| Dimensions (mm) | 385 x 185 x 71 (L x W x H) |

Order Codes and Options

| | |
|---------------|---|
| ELS8/M3/P-H: | Exi-Lite 3 hour maintained addressable emergency luminaire |
| ELS8/NM3/P-H: | Exi-Lite 3 hour non-maintained addressable emergency luminaire |
| ELD8/M3/P-H: | Double sided Exi-Lite 3 hour maintained addressable emergency luminaire |
| ELD8/NM3/P-H: | Double sided Exi-Lite 3 hour non-maintained addressable emergency luminaire |

More Information

Exi-Lite Exit Legends

The Exi-Lite comes with a default downwards directional arrow in the EC format. If alternative directions are required, please use the following suffixes to the part code.

/AU Arrow Up **/AL** Arrow left **/AR** Arrow right

For example, ELS8/M3/P-H/AR

The legends are also available in ISO formatting, please state this if that format is required (see below example).




Exi-Lite Finishes

The Exi-Lite is supplied as standard with a white epoxy coated steel fitting. The luminaire is also available in both Chrome and Brass finishes. See the order codes listed below.

/CH Chrome Finish **/BR** Brass finish

Dimensions

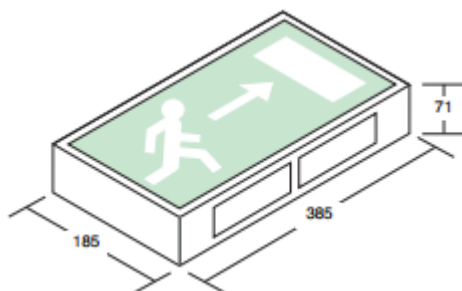

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle, NE12 8EW, UK T: +44 (0)1670 707 111, E: enquiries@luxintelligent.com, W: www.luxintelligent.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.