

The Advanced AV-RMIC is an all-call remote microphone designed for use with an Advanced hardwired (non networked) single amplifier audio system; AV-VBM, AV-VB, AX-CTL-(x)V and command centers. The AV-RMIC provides a means of all-call paging via an associated Axis AX AV-AMP-80 audio amplifier from a remote location. Whenever the AV-RMIC all-call remote microphone is keyed, the interfaced AV-AMP-80 amplifier is placed into boost mode for remote microphone audio broadcasting.

The AV-RMIC all-call remote microphone consists of a lockable enclosure with microphone and remote microphone module. In addition, the AV-RMIC includes a remote microphone interface module (AV-RMI) which gets installed at the single amplifier for remote microphone interface and supervision. To retrofit an existing Axis AX installation enclosure for AV-RMIC usage, an AV-RMI-RP remote microphone interface module retrofit plate is available.

The remote microphone module also includes additional service/diagnostic LEDs for audio open circuit, audio short circuit, input power supply trouble, microphone disconnected and microphone push to talk switch trouble.




### Features

- All-call Remote Paging Microphone
- Completely Supervised with Interfaced Audio Amplifier
- Microphone Supervised for Opens and Disconnection
- Isolated Studio Output Supervised for Opens/Shorts
- Advanced CAT30 Key Access
- Removable Inner and Outer Doors for Servicing
- Visible Power & Trouble LEDs
- PCB Service/Diagnostic Status LEDs
- Pluggable Terminal Blocks
- Plexiglas Window for Viewing Microphone and Status LEDs
- Surface or Semi Flush Mountable

### Listings and Approvals

- ETL ANSI/UL 864/1711/1481 Listed: 101564744NYM-001, 100027836NYM-001c
- NYC FD COA #6105A2

## Wiring Diagram

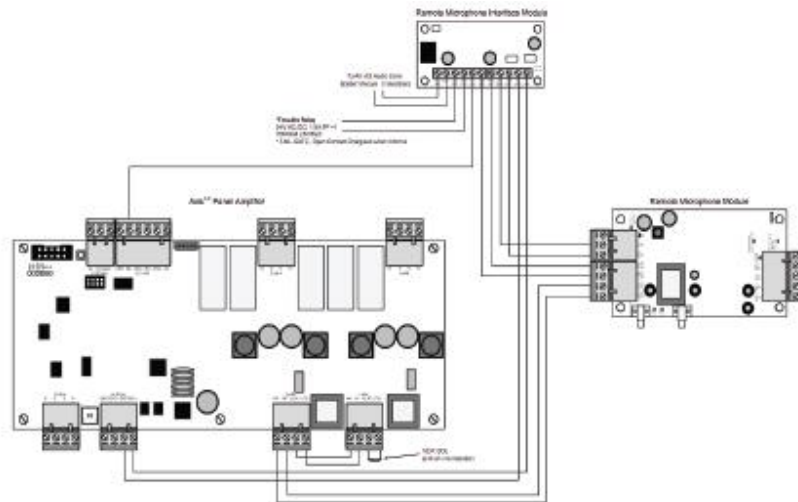

## Specification

Operating Voltage	17 to 28 VDC
Operating Current	.070 Amp (Quiescent) .085 Amp (Alarm)
Wiring (Recommended)	All wiring supervised and power limited
24 VDC Supply	Twisting pair (Maximum cable impedance 40Ω)
Microphone Audio	Twisted shielded pair (Maximum cable impedance 40 Ω)
End of Line (EOL)	100K
Microphone and Trouble Monitoring	Twisted pair (Maximum cable impedance 50Ω)
LED Status	Power Trouble
Front Viewable	Audio Open Circuit and Short Circuit
PCB Service/Diagnostic	Input Power Trouble
	Microphone Disconnected
	Microphone Push to Talk Switch
Operating Temperature	32 °F-120 °F (0 °C to 48 °C)
Humidity	10-95% (Non-condensing)
Enclosure Dimension	11 1/2"W x 13"H x 4 1/2"D
Weight	10lb 2oz

## Order Codes and Options

AV-RMIC	All Call Remote Microphone
AV-RMI-RP	Remote Microphone Retrofit Plate

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, 100 South Street, Hopkinton, MA. 01748 T: +508 435 9995 E: [usa@advancedco.com](mailto:usa@advancedco.com) W: [us.advancedco.com](http://us.advancedco.com)

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.