Axis AX

Thermal Strip Printer

The AX-PRN panel enclosure mount, thermal strip printer is an ancillary peripheral for use with the Axis AX Series range of Intelligent Fire Alarm Control Panels

The strip printer can be configured to provide automatic or on-demand printing of Intelligent Fire Alarm Control Panel history event logs and system status events

On networked systems, automatic printing of alarms can be printed from anywhere on the network, unless the panel containing the strip printer is programmed not to show the specific network event.

The strip printer operates silently and fast, with integral battery backup to enable continuous, uninterrupted operation even during AC failures. Each provides 30 character width printing.

Spare rolls of thermal paper can easily be replaced due to the mechanisms easy access front-loading compartment.

Listings and Approvals

- Certified to UL864 10th Edition – File No. S35979
- CSFM Approved: Pending
- NYCFD COA: Pending



Features

- Thermal Printing
- Silent Operation
- Fast Instant Response
- Integral Battery Backup

Automatic Printing for:

- Alarms
- Troubles
- Off Normal Events

On Demand Option For Printing:

- Input Status and Configuration
- Output Status and Configuration
- Disablements
- History Event Logs
- Network Troubles
- System Testing

Specification

Printer Type	Thermal dot matrix
Print Resolution	384 Dots Per Line
Operating Voltage	5 VDC
Operating Current Quiescent Continuous Printing (Typical 30% duty cycle)	 18 mA 538 mA (average)/1.0A (peak) @24V
Operating Temperature	60ºF - 86ºF (15ºC - 27ºC)

Order Codes and Options

AX-PRN*	Thermal Strip Printer single aperture mount, Axis AX Series Panels
MXS-509	Spare Thermal Printer Rolls (58mm wide x 10m long) Qty 1

*For gray, add the suffix **-G** to the part number.

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000 E: enquiries@advancedco.com
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.

Axis AX

Fan/Damper Control Module


Providing superior flexibility and customization, the Fan/Damper Control Module (AX-ACM-6) provides three position (ON/OFF/AUTO) smoke control and annunciation of any fan, damper or combination fan/damper, controlled by an Axis AX Intelligent Fire Alarm Control Panel. Each fan/damper control module can accommodate six (6) fan, damper or combination fan/damper control areas. Control area buttons include Run – Auto – Stop (Close – Auto – Open) with white position status LEDs. Control areas also include three status LEDs (red, yellow and green) for the indication of the fan, damper or combination fan/damper Running – Trouble – Stopped (Closed – Trouble – Opened) status.

Besides offering control areas for fans, dampers and combination fans/dampers, a control area can also be configured as a master smoke control area. A master smoke control area provides three control buttons with activation white LEDs and three (red, yellow and green) status LEDs. Master smoke control buttons include, a HVAC reset button (i.e. firefighter fan/damper restart) for the reset of FACP controlled HVAC latched relays, an HVAC fire alarm control bypass button and a lamp test button. The three status LEDs include, a red HVAC latched relays require reset LED, a yellow HVAC fire alarm control bypass active LED and green smoke control operation heartbeat LED.

The AX-ACM-6 is easily configurable utilizing the Advanced PC-NeT field configuration tool which works in a Windows environment. The level of annunciation and control is totally controlled by the system programming and the installation requirements.

Up to 16 AX-ACM-6 modules can be connected to an Axis AX Intelligent Fire Alarm Control Panel, Local Operating Console or Peripheral Expansion Network Node Module. The SLC (signaling line circuit) fan and damper control and status modules can either be connected to the fire alarm panel with associated smoke control or connected to other fire alarm panel SLC circuits located throughout an Advanced peer-to-peer network. In addition to the SLC devices being distributed around the network, additional duplicate smoke control locations can be configured within a network, with one being in control at a single time.

The AX-ACM-6 fan/damper control module can be mounted in any single aperture location of an Axis AX enclosure (fire alarm control panel, local zone annunciator, local operating console, etc.). Located on each AX-ACM-6 module are two slide-in label areas, these label areas are for the labeling of installation specific control areas.

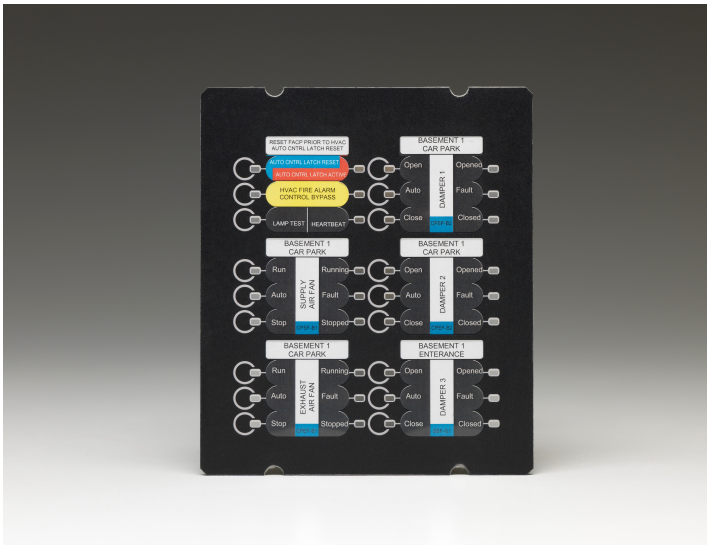


Features

- Listed for Dedicated & Non Dedicated Smoke Control
- Freely Programmable ON/OFF/AUTO Control
- Includes Six (6) Fan/Damper Control Areas
- Optional Programmable Master Smoke Control Area
- Communicates via Advanced PBUS
- Includes 18 Switches and 36 LEDs
- Easy Slide-In Label Locations
- Supervised Monitoring Trouble Input
- Configurable On-Board Piezo (Buzzer)
- Multi-Module Daisy Chain Connections for Ease of Installation


Listings and Approvals

- Certified to UL864 10thEdition – File No. S35979
- Meets Requirements under UL Category Code UUKL & NFPA92
- CSFM Approved: Pending

Control Buttons & Status LEDs

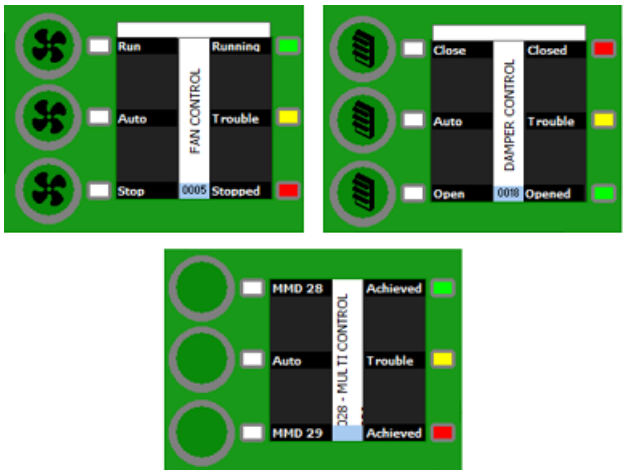

Wiring Diagram

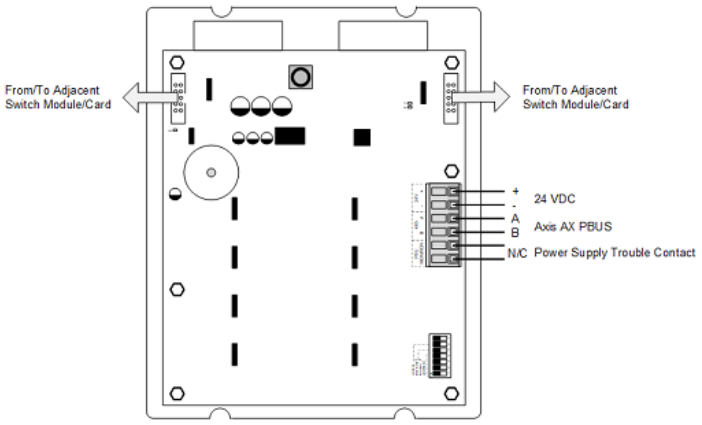

Specification

Input Voltage (DC)	18-28 VDC (wired from FACP 24VDC or fire alarm listed power supply)
Operating Current	60mA max Typical all outputs OFF: 14mA Typical all outputs ON: 55mA
Inputs	18 Buttons (3 per Fan/Damper Control)
Outputs	36 LEDs (6 per Fan/Damper Control) Programmable on-board buzzer (piezo)
Piezo (Buzzer)	Field Configurable: Pulse (half second), Pulse (one second) or Steady
External Monitoring Input	Supervised Closed Contact
Operating Temperature	32^0F - 120^0F (0^0C - 49^0C)
Humidity	10 - 95% RH (Non-Condensing)
Dimensions	6.6"(H) x 5.7"(W) x 1.2"(D)
Weight	11 oz
Daisy Chain Serial Headers	10-Way IDC Ribbon Connector for Multi-Module Interconnect

Ordering Information

AX-ACM-6	Fan/Damper Control Module

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000 E: enquiries@advancedco.com
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.