

Legacy Add-Lite

The Add-Lite is a stylish low profile 8W fluorescent luminaire with a white base and comes as standard with an opal diffuser. The Add-Lite comes complete as a high light output product, providing 180 Lumens in emergency operation. A clear prismatic diffuser option is also available and is ideal for self-adhesive safety sign legends.

The Add-Lite is available with mains only, non-maintained or switchable maintained modes of operation. Maintained versions can be used for standard switched mains lighting but will automatically provide emergency lighting in the event of a complete loss of normal mains supply.

All emergency versions provide three-hour duration as standard from integral high-temperature nickel cadmium batteries and comes complete with an 8W T5 lamp and gear mounted on a removable gear tray. The Add-Lite has the added benefit of clip on diffusers for ease of access and fully complies with the requirements of EN60598.2.22.

The Add-Lite is available in a variety of configurations including addressable slave versions for central battery operation, covering a range of operating voltages including 24, 48 and 110Vdc. The luminaire is supplied as standard, complete with communication capability for use with the LuxIntelligent range of emergency lighting test panels.



Features

- Stylish low profile luminaire
- Fully LuxIntelligent compatible
- Quick access for changing lamps
- Fully compliant with EN60598.2.22

Specification

Supply voltage	230Volt (220-240V) @ 50Hz
Light source	8 Watt T5 fluorescent
Supply current	Maintained:90mA Non-maintained: 40mA
Battery	3.6V 4Ah NiCd
Recharge period	24 hours (14 hours for 1-hour duration)
Cable entry	20mm drilling points in sides and back
IP rating	IP20 Ta 25°C
Dimensions (mm)	390 (L) x 186 (W) x 70 (H)

Order Codes and Options


AL8/M3/P-H:	Add-Lite 8W 3 hour maintained 3 cell addressable bulkhead
AL8/NM3/P-H:	Add-Lite 8W 3 hour non-maintained 3 cell addressable bulkhead
AL8/NM3/P-H/RL:	Add-Lite 8W 3 hour non-maintained addressable bulkhead c/w relay
AL8/24/P:	Add-Lite 8W addressable slave bulkhead

More Information

Spacing Data

	Mounting height Hm (m)	Trans. to wall	Trans. to trans.	Axial to trans.	Axial to axial	Axial to wall	
							
Best case (HighLight fresnel)	2.5	3.0	9.2	8.1	5.4	2.0	1 Lux min. at centre
	4.0	2.4	8.7	4.6	4.3	1.4	
	2.5	5.1	12.5	10.6	6.5	2.6	0.5 Lux min. (open)
	4.0	4.4	12.6	10.8	6.9	2.2	

Dimensions

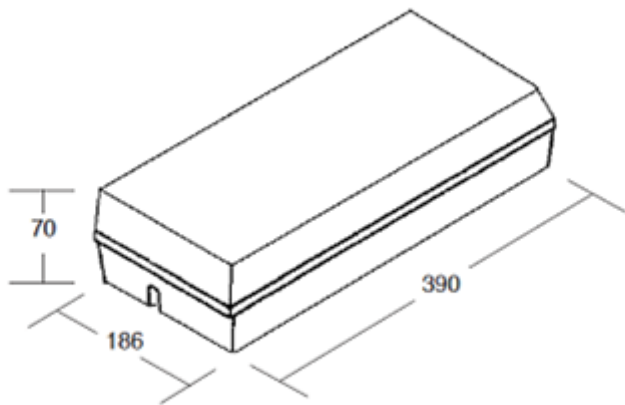

Example of adhesive legend



Legacy Blade-Lite

The Blade-Lite is available as both a suspended Exit luminaire or with recessed body, ideal where ceiling heights are lower, constraining the permitted depths of hanging signs. The luminaires are manufactured in galvanised steel and are supplied as standard, in white, but brass and chrome finishes are available. The luminaires are supplied normally with a ceiling bracket and suspension chains that can be altered to suit the installation. The luminaires come complete with exit legends that comply with a viewing distance of 36 Metres. These legends are available in both EC and ISO formats.

Operation

The Blade-Lite is available in maintained and non-maintained versions, providing a full three hours of operation in the event of a local lighting circuit failure. The Blade-Lite is also suitable for central battery and static inverter installations.

Installation

Cable entry to the ceiling baton is via 20mm holes in the top. The length of the suspension chain can be adjusted to suit the installation. The dimensions for the recessed version are illustrated on page two. The Blade-Lite fully complies with the requirements of EN60598.2.22 and supports all the features of the Lux Intelligent emergency lighting testing panels.



Features

- Available as hanging blade type, or recessed
- Suitable for 36-metre viewing distances
- Fully complies with EN60598.2.22
- Available in a choice of finishes
- Supports all Lux Intelligent testing panel features

Specification

Supply Voltage	230 Volt (220-240V) @ 50Hz
Light Source	8W T5
Current	Maintained: 90mA Non-maintained: 40mA
Battery	3.6V 4AHr NiCd
Recharge Period	24 Hours (14 hours for 1 hour duration)
Cable Entry	20mm holes in top
IP Rating	IP20 @ 25°C
Dimensions (mm)	Legend assembly: 358 (L) x 61 (W) x 300 (H) Baton: 358 (L) x 61 (W) x 42 (H)

Order Codes and Options

BLD8/M3/P-H:	Blade-Lite 8W 3 hour maintained double sided addressable exit luminaire (arrows left/right)
BLD8/NM3/P-H:	Blade-Lite 8W 3 hour non-maintained double sided addressable exit luminaire (arrows left/right)
BLS8/M3/P-H/R:	Recessed Blade-Lite 8W 3 hour maintained single sided addressable exit luminaire
BLS8/NM3/P-H/R:	Recessed Blade-Lite 8W 3 hour non-maintained single sided addressable exit luminaire

More Information

Blade-Lite Exit Legends

The Blade-Lite comes with a default Left/Right directional legend in the EC format. If alternative directions are required, please use the following suffixes to the part code.


/AU Arrow Up **/AD** Arrow Down

For example, BLS8/M3/P-H/AD

The legends are also available in ISO formatting, please state this if that format is required (see below example).



Recessed Cut-out Dimensions

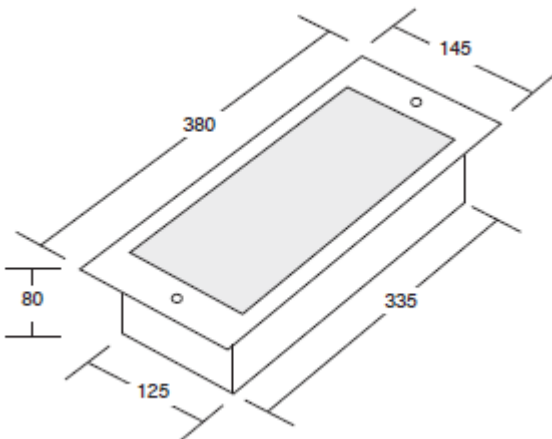

Blade-Lite Finishes

The Blade-Lite is supplied as standard with white epoxy coated steel fitting. The luminaire is also available in both chrome and brass finishes. See the order codes listed below.

/CH Chrome Finish **/BR** Brass finish



Legacy Exi-Lite

The Exi-Lite is a robust exit direction luminaire. The design of the luminaire provides viewing distances of 36 metres, whilst the high 180 Lumens output ensures good visibility. The standard luminaire is supplied in a white epoxy coated steel enclosure, coming complete with a printed opal polycarbonate legend. The luminaire also provides good visibility, with the addition an opal panel across the bottom of the luminaire ensuring maximum light levels in the event of an emergency.

More decorative finishes are available in both chrome and brass, whilst the exit legends are available in both EC and ISO formats.

Operation

The Exi-Lite is available in maintained and non-maintained versions, providing a full three hours of operation in the event of the local lighting circuit failing. The luminaire can be supplied in other supply voltage variations and is also suitable for use with hold off relays.

Installation

The Exi-Lite comes with a back BESA entry on the single sided and on the top on the double sided variants. The luminaire fully complies with the requirements of EN60598.2.22 and supports all the features of the LuxIntelligent emergency lighting testing panels.



Features

- Excellent 36-metre viewing distances
- Robust design with a choice of superior finishes
- Fully complies with EN60598.2.22
- Supports all the features of the LuxIntelligent range of testing panels

Specification

Supply voltage	230 Volts (220-240V) @ 50Hz
Supply current	Maintained:90mA
	Non-maintained:40mA
Lamp	8W T5
Battery	3.6V 4AHr NiCd (nominal charge current 250mA)
Recharge period	24 Hours (14 hours for 1-hour duration)
Cable entry	Back BESA entry
IP rating	IP20
Construction	Epoxy coated galvanised steel with polycarbonate legend
Weight	2.5kg
Dimensions (mm)	385 x 185 x 71 (L x W x H)

Order Codes and Options

ELS8/M3/P-H:	Exi-Lite 3 hour maintained addressable emergency luminaire
ELS8/NM3/P-H:	Exi-Lite 3 hour non-maintained addressable emergency luminaire
ELD8/M3/P-H:	Double-sided Exi-Lite 3 hour maintained addressable emergency luminaire
ELD8/NM3/P-H:	Double-sided Exi-Lite 3 hour non-maintained addressable emergency luminaire

More Information

Exi-Lite Exit Legends

The Exi-Lite comes with a default downwards directional arrow in the EC format. If alternative directions are required, please use the following suffixes to the part code.

/AU Arrow Up **/AL** Arrow left **/AR** Arrow right

For example, ELS8/M3/P-H/AR

The legends are also available in ISO formatting, please state this if that format is required (see below example).




Exi-Lite Finishes

The Exi-Lite is supplied as standard with a white epoxy coated steel fitting. The luminaire is also available in both chrome and brass finishes. See the order codes listed below.

/CH Chrome Finish **/BR** Brass finish

Dimensions

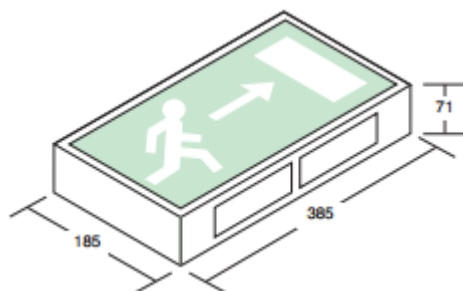

Advanced, The Bridges, Balliol Business Park, Newcastle, NE12 8EW, UK **T:** +44 (0)1670 707 111 **E:** enquiries@luxintelligent.com **W:** www.luxintelligent.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.

Legacy Circu-Lite

The Circu-Lite offers both mains and emergency lighting in a simple but stylish luminaire with a white polycarbonate base and opal polycarbonate diffuser, sealed to IP65.

Installation

The Circu-Lite is supplied with a unique lever release for the diffuser which provides access to the control gear and lamp, which are mounted on a removable gear tray. The luminaires are available with mains only or switchable maintained operation. Non-maintained can be achieved by excluding the normal switched mains supply.

Operation

All emergency versions provide 3-hour duration as standard, from integral high-temperature nickel cadmium batteries. Maintained versions can be used for standard switched mains lighting but will automatically provide emergency lighting in the event of a complete loss of normal mains supply. Dali dimming controls can be added as an option.

The Circu-Lite fully complies to the requirements of EN60598.2.22. It also fully supports all the features of the LuxIntelligent range of emergency lighting test panels.



Features

- Decorative circular luminaire
- Standard and dimmable versions available
- Fully compatible with LuxIntelligent
- Fully complies with all aspects of EN60598.2.22

Specification

Supply voltage	230 Volts (220-240V) @ 50Hz
Light source	28W 2D
Supply current	Maintained:160mA Non-maintained:40mA
Battery	4.8V 4Ahr
Recharge period	24 hours (14 hours 1-hour duration)
Cable entry	20mm side entry, 13mm hole in rear
IP rating	IP65 Ta 25°C
Dimensions (mm)	330 (Diameter) x 126 (Height)

Order Codes and Options

UL28/M3/P:	Circu-Lite 28W 3 hour maintained addressable luminaire
UL28/AC:	Circu-Lite 28W mains-only luminaire
UL28/M3/P/Dali:	Circu-Lite 28W 3 hour maintained addressable luminaire with dali operation
UL28/AC/Dali:	Circu-Lite 28W mains-only luminaire with dali operation

Advanced, The Bridges, Balliol Business Park, Newcastle, NE12 8EW, UK **T:** +44 (0)1670 707 111 **E:** enquiries@luxintelligent.com **W:** www.luxintelligent.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.

Legacy Flush-Lite


A Flush-Lite luminaire is a discrete option of introducing emergency lighting to a location. The luminaires sit almost completely flush to the surface of the wall or ceiling, available with white surface trim plates, or for a more stylish option, Chrome or Brass surface plates can be supplied with the luminaire.

The standard Flush-Lite comes with a galvanised steel back box, epoxy coated white surface trim and a prismatic polycarbonate diffuser. This can be replaced with an opal polycarbonate panel if required. This is a good option if it is planned to add an adhesive exit legend to the Flush-Lite.

Operation

The Flush-Lite is available as maintained and non-maintained units, which in the event of a local lighting circuit power outage, the Flush-Lite will output 180 Lumens for three hours from integral high-temperature nickel cadmium batteries. Maintained versions can be used for standard switched mains lighting but will automatically provide emergency lighting in the event of a complete loss of normal mains supply.

The luminaires fully comply with the requirements of EN60598.2.22 and fully supports all of the features of the LuxIntelligent range of testing panels.

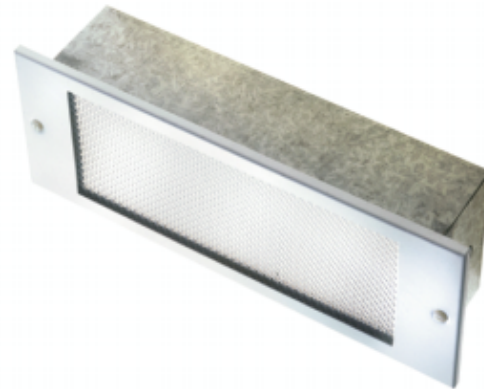

Features

- Discrete emergency luminaire
- High 180 lumens output in emergency
- Fully complies with EN60598.2.22
- Fully supports all the features of the LuxIntelligent panels

Specification


Supply voltage	230 Volts (220-240V) @ 50Hz
Supply current	Maintained: 90mA
	Non-maintained:40mA
Lamp	8W T5
Battery	3.6V 4 AHr NiCd (nominal charge current 250mA)
Recharge period	24 Hours (14 hours for 1 hour duration)
Cable entry	20mm holes at each end
Geartray	White painted steel on keyhole slots
IP rating	IP25 at Ta °C
Dimensions (mm)	Cut-out 340 (L) x 128 (W)
	Fascia plate 380 (L) x 145 (W)

Order Codes and Options

FL8/M3/P-H:	Flush-Lite 8W 3 hour maintained 3 cell addressable luminaire
FL8/NM3/P-H:	Flush-Lite 8W 3 hour non-maintained 3 cell addressable luminaire
FL8/M3/P-H/OP:	Flush-Lite 8W 3 hour maintained 3 cell addressable luminaire with opal diffuser
Leg-001:	Adhesive exit legend

More Options

Flush-Lite Dimensions

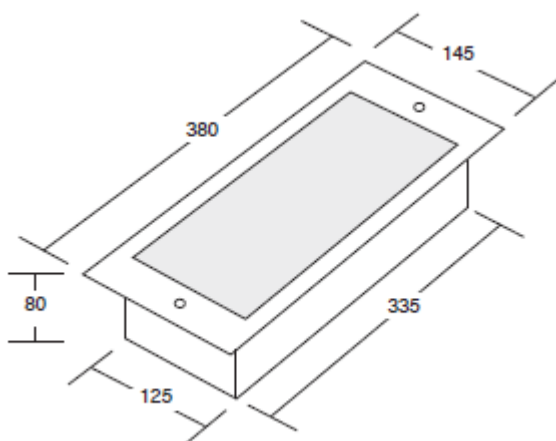

Flush-Lite Finishes

The Flush-Lite is available with alternative polished trim plates. These are available in polished chrome or brass. Use the suffixes listed below to select an alternative finish.

/CH Polished Chrome **/BR** Polished Brass

For example, FL8/NM3/P-H/CH

Legacy Indi-Lite

The Indi-Lite range of luminaires offers a cost effective method of providing efficient mains lighting from high lumen output T5 lamps enclosed in attractive but robust IP65 rated polycarbonate enclosures, resistant to moisture and dust. The polycarbonate lenses provide wide distribution with a degree of upward light.

The luminaires are supplied complete with stainless steel clips, removable gear tray, suspension brackets and two 20mm glands.

There is a choice between twin and single lamp variants. The luminaires are available as standard mains only or integral addressable emergency fittings. The luminaires can also be supplied with T8 lamps as an option.

All emergency versions provide 3-hour duration as standard, from integral high-temperature nickel cadmium batteries. The emergency versions can be used as part of the general lighting via a switched mains supply but they will automatically provide emergency lighting in the event of a complete loss of normal mains supply.

Installation

The luminaire is suitable for both surface and suspension mounting. The luminaires have two 20mm glands and suspension brackets

The luminaire fully complies with the requirements of EN60598.2.22 and supports all of the features of the LuxIntelligent emergency lighting test panels.



Features

- Polycarbonate base and defuser
- Electronic HF gear
- IP65 rated
- Stainless steel clips
- Slim attractive design

Specification

Supply voltage	230Volt (220-240V) @ 50Hz
Light source	Single and twin 28W/35W/49W T5 and 18W/36W/58W (T8)
Battery	Nickel cadmium 4AHr
Recharge period	24 hours (14 hours for 1 hour duration)
Cable entry	Two 20mm gland entries
IP rating	IP65 at 25°C
Construction	Polycarbonate base and diffuser
Geartray	Removable white steel geartray

Order Codes and Options

IND128/AC:	Indi-Lite single 28W T5 mains-only luminaire
IND228/AC:	Indi-Lite double 28W T5 mains-only luminaire
IND128/M3/P:	Indi-Lite single 28W T5 3 hour maintained addressable luminaire
IND228/M3/P:	Indi-Lite double 28W T5 3 hour maintained addressable luminaire
IND258/AC:	Indi-Lite double 58W T8 mains-only luminaire
IND258/M3/P:	Indi-Lite double 58W T8 3 hour maintained addressable luminaire

Advanced, The Bridges, Balliol Business Park, Newcastle, NE12 8EW, UK **T:** +44 (0)1670 707 111 **E:** enquiries@luxintelligent.com **W:** www.luxintelligent.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.

Legacy Lumi-Lite

The Lumi-Lite luminaire provides a high-quality IP65 rated bulkhead, complete with an opal polycarbonate diffuser. The Lumi-Lite is a high output product, providing 180 Lumens in emergency as standard, creating opportunities to minimise the number of luminaires required in an installation. Lumi-Lite luminaires can be surface mounted or semi-recessed and can be used, in conjunction with adhesive legends, to direct building occupants to their nearest means of exit.

The Lumi-Lite is available in a variety of configurations including addressable slave versions for central battery operation, covering a wide range of operating voltages (24, 48 and 110Vdc). The luminaire is supplied as standard, complete with communication capability for use with the LuxIntelligent range of emergency lighting test systems.

Operation

The Lumi-Lite is available as a mains only luminaire, or with non-maintained or switchable maintained modes of operation. Maintained versions can be used for standard switched mains lighting but will automatically provide emergency lighting in the event of a complete loss of normal mains supply. All emergency versions provide three-hour duration as standard from integral high-temperature nickel cadmium batteries and come complete with an 8W T5 lamp and gear mounted on a removable gear tray. The Lumi-Lite fully complies with the requirements of EN60598.2.22.

Installation

The luminaire comes complete with cable entries at both ends and in the back.



Features

- Robust IP65 rated luminaire
- High 180-lumen output as standard
- Suitable for adding directional legends
- Fully compliant with EN60598.2.22
- Fully supports LuxIntelligent testing system
- Available in a wide selection of configurations

Specification

Supply voltage	230Volt (220-240V) @ 50Hz
Supply current	Maintained: 90mA Non-maintained:40mA
Light source	8W T5
Battery	3.6V 4AHr NiCd
Recharge period	24 hours (14 hours 1-hour duration)
Cable entry	20mm drilling points in ends and back
IP rating	IP65 @ Ta 25°C
Geartray	Hinged white painted steel
Dimensions (mm)	370 x 140 x 100 (L x W x H)

Order Codes and Options


LL8/M3/P-H:	Lumi-Lite 8W maintained 3 hour addressable luminaire
LL8/NM3/P-H:	Lumi-Lite 8W non-maintained 3 hour addressable luminaire
LL8/B:	Lumi-Lite semi-recessible bezel
LL8/WG:	Lumi-Lite attachable wire guard
LEG-001:	Adhesive legend for use on Lumi-Lites
LL8/NM3/P-H/SOC:	Lumi-Lite 8W non-maintained 3 hour addressable luminaire with data and power sockets
LL8/NM3/P-H/RL:	Lumi-Lite 8W non-maintained 3 hour addressable luminaire with relay

More Information

Spacing Data

Mounting height Hm (m)	Trans. to wall	Trans. to trans.	Axial to trans.	Axial to axial	Axial to wall	
2.5	3.0	9.2	8.1	5.4	2.0	1 Lux min. at centre
4.0	2.4	8.7	4.6	4.3	1.4	
2.5	5.1	12.5	10.6	6.5	2.6	0.5 Lux min. (open)
4.0	4.4	12.6	10.8	6.9	2.2	

Dimensions

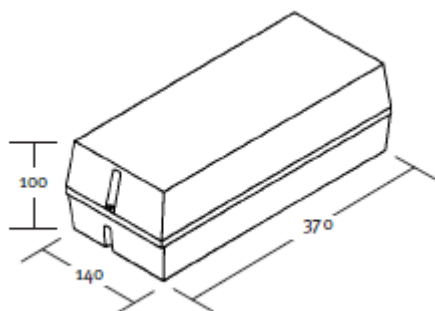

Advanced, The Bridges, Balliol Business Park, Newcastle, NE12 8EW, UK T: +44 (0)1670 707 111 E: enquiries@luxintelligent.com W: www.luxintelligent.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.

Legacy Mor-Lite

The Mor-Lite luminaire provides a high-quality IP65 rated polycarbonate bulkhead, complete with a fresnel lens. The Mor-Lite is a high output product, providing 180 lumens in emergency as standard, creating opportunities to minimise the number of luminaires required in an installation. Mor-Lite luminaires can be surface-mounted or semi-recessed and can be used, in conjunction with adhesive legends, to direct building occupants to their nearest means of exit.

The Mor-Lite is available in a variety of configurations including addressable slave versions for central battery operation, covering a wide range of operating voltages (24, 48 and 110Vdc). The luminaire is supplied as standard, complete with communication capability for use with the LuxIntelligent range of emergency lighting test systems.

Operation

The Mor-Lite is available as a mains-only luminaire, or with non-maintained or switchable maintained modes of operation. Maintained versions can be used for standard switched mains lighting but will automatically provide emergency lighting in the event of a complete loss of normal mains supply. All emergency versions provide three-hour duration as standard from integral high-temperature nickel cadmium batteries and come complete with an 8W T5 lamp and gear mounted on a removable gear tray. The Mor-Lite fully complies with the requirements of EN60598.2.22.

Installation

The luminaire comes complete with cable entries at both ends and in the back.



Features

- High 180-lumen output as standard
- Fully LuxIntelligent compatible
- Full-size IP65 style luminaire
- Suitable to add directional legends
- Fully compliant with EN60598.2.22
- Robust IP65 luminaire

Specification

Supply voltage	230Volt (220-240V) @ 50Hz
Light source	8W T5
Supply current	Maintained: 90mA
	Non-maintained: 40mA
Battery	3.6V 4AHr NiCd
Recharge period	24 hours (14 hours 1 hour duration)
Cable entry	20mm drilling points in ends and back
IP rating	IP65 Ta25°C
Geartray	Hinged white painted steel
Dimensions (mm)	370 (L) x 140 (W) x 100 (H)

Order Codes and Options


RL8/M3/P-H:	Mor-Lite 8W 3 hour maintained 3 cell luminaire
RL8/NM3/P-H:	Mor-Lite 8W 3 hour non-maintained 3 cell luminaire
RL11/NM3/P-H:	Mor-Lite 11W 3 hour non-maintained 3 cell luminaire
RL8/B:	Mor-Lite semi-recessable bezel
RL8/WG:	Mor-Lite wire guard
RL8/EX:	Mor-Lite blade-type exit attachment
RL8/NM3/P-H/RL:	Mor-Lite 8W 3 hour non-maintained luminaire with relay
RL8/NM3/P-H/SOC:	Mor-Lite 8W 3 hour non-maintained luminaire complete with data and power sockets

More Information

Spacing Data

Mounting height Hm (m)	Trans. to wall	Trans. to trans.	Axial to trans.	Axial to axial	Axial to wall	
2.5	3.0	9.2	8.1	5.4	2.0	1 Lux min. at centre
4.0	2.4	8.7	4.6	4.3	1.4	
2.5	5.1	12.5	10.6	6.5	2.6	0.5 Lux min. (open)
4.0	4.4	12.6	10.8	6.9	2.2	

Dimensions

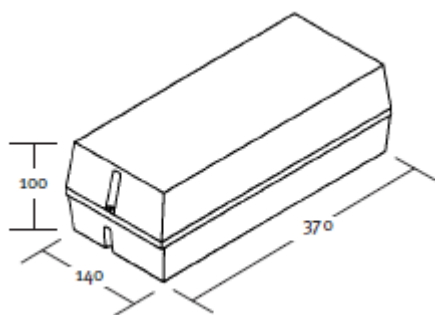

Deep Diffuser



Advanced, The Bridges, Balliol Business Park, Newcastle, NE12 8EW, UK T: +44 (0)1670 707 111 E: enquiries@luxintelligent.com W: www.luxintelligent.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.

Legacy Twin-Lite

The Twin-Lite range offers simple and effective emergency lighting from robust high-intensity projectors. The 20W units provide 3 hours of emergency lighting from integral valve-regulated lead acid batteries. The 20W tungsten halogen lamps are housed within wide distribution polycarbonate lens projectors. The 55W variants provide one hour of emergency lighting and are housed within glass narrow distribution beam projectors. The units are also available with a delay timer relay option allowing the lamps to maintain their output for a limited period of time after mains has returned.

Operation

In the event of a power failure, the units will operate the projectors for their appropriate duration, depending on the lamps used. With the delay timer option, the projectors can remain illuminated whilst general discharge luminaires are allowed to ignite and provide a suitable light output.

Installation

Both types of projector can be remotely mounted away from the control box. The construction of the control box also allows for mounting the unit with the projectors on the underside. The luminaires fully comply to the requirements of EN60598.2.22. The standard luminaires are supplied fully support all the features of the LuxIntelligent test system.



Features

- Ideal for large area anti-panic applications
- Available with 20W or 55W tungsten halogen lamps.
- Available with integral delay timer
- Fully compatible with LuxIntelligent test system

Specification

Supply voltage	230Volt (220V-240V) @50Hz
Supply current	80mA
Lamp	Two 20W TH or two 55W TH
Battery	12V 12AHr VRLA (nominal charge current 250mA)
Recharge period	24 Hours (14 hours for 1-hour duration (20W))
Cable entry	20mm holes in ends
IP rating	IP20 Ta 25°C (standard version) IP65 Ta 25°C (WP version)
Construction	White epoxy coated steel enclosure (IP20) Light grey GRP enclosure (IP65)
Weight	8.1kg
Dimensions (mm)	350 x 300 x 105 (IP20)
(H x W x D)	300 x 330 x 130 (IP65)

Order Codes and Options


TL20/NM3/P/H:	Twin-Lite TH 20W non-maintained addressable luminaire
TL20/NM3/P/H/WP:	Twin-Lite 20W TH non-maintained IP65 addressable luminaire
TL20/NM3/P/RL:	Twin-Lite 20W TH non-maintained addressable luminaire with timer delay relay
TL55/NM1/P/H:	Twin-Lite 55W TH non-maintained addressable luminaire

More Information

Spacing Data

Mounting height Hm (m)	Max distance between 20W projectors	
4	22m	1 Lux min. at centre of escape
6	24m	
8	21m	
10	—	
4	24m	0.5 Lux min. open area
6	30m	
8	25m	
10	20m	

Dimensions

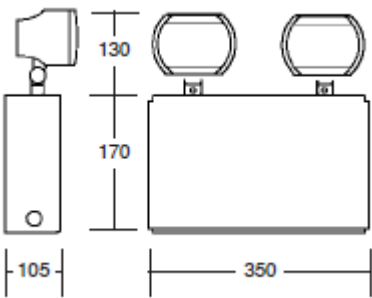

Legacy Lite Conversions

Advanced is proud to be an ICEL registered conversion house, meeting the exacting requirements of the ICEL 1004 for the re-engineering of luminaires for emergency use. As an experienced conversion service, any style of conversion can be undertaken, including both fluorescents and LED light sources.


Upon receipt of the luminaire, it will be examined to determine the best-suited type of conversion, either integral or remote. Once the conversion is complete, including the addition of any addressable components, the luminaires are fully tested before being returned to the customer.

All components used are selected to provide the best emergency solution and performance. Standard fluorescent inverters operate with total isolation, where four pole change-over operation of the lamp/gear connections operates with a timed fifth pole to make and break the ballast live supply. Only the highest quality nickel cadmium and nickel-metal hydride batteries are used. Conversions are completed to ensure successful operation with all ballast types, including HF and dimming. Fluorescent conversions ranging from 18W T8 lamps all the way to 80W T5 tubes can be achieved, including various lamp types from 2D to TCT styles.

With access to a large selection of LED emergency controllers, both low and high power, there is a solution to all LED luminaires.

Since Advanced is ISO9001 certified, it means that after conversion of the luminaire to emergency operation, the CE mark can be re-applied to it. With all conversions to emergency operation, the full warranty of the luminaire reverts to Advanced, providing peace of mind to the customer.

The conversions fully incorporate all features of the LuxIntelligent range of emergency lighting test panels.

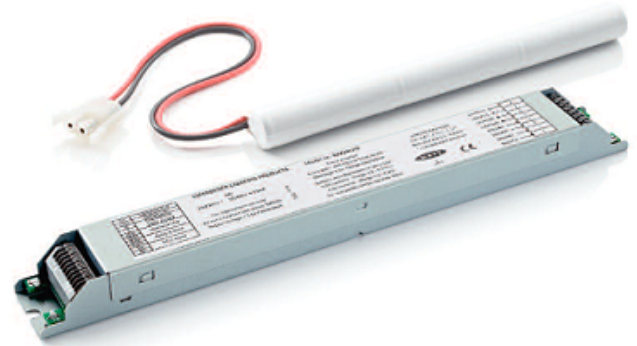

Features

- Integral conversions implemented, whenever possible
- Advanced are an ICEL 1004 approved conversion house
- Addressable and emergency conversions available
- Warranty is provided for the whole luminaire after conversion
- Fluorescent and LED light source conversions provided

Specification

Battery type	Nickel cadmium or nickel metal hydride
Battery quantity	3 to 6 cells
BLF	Typically 7-20% (dependant on lamp type/size)
Emergency duration	3 hours
Charging LED	Standard green LED supplied
Remote enclosure dimensions (mm)	359 (L) x 159 (W) x 45 (D) (largest size)

Order Codes and Options

CON18P:	Up to 18W integral addressable conversion
CON40PR:	19 to 40W T8 addressable conversion with remote box
CON514P:	14W T5 integral addressable conversion
CON3WLEDP:	3W LED addressable conversion with 3-hour emergency pack
Lxp-302F:	Conversion of an existing emergency luminaire to an addressable emergency luminaire

Legacy Cine-Lite

Cine-Lite luminaires provide a simple solution to discrete exit signage. It is available as both maintained and non-maintained variations and comes with an opal down light panel to illuminate directly below the luminaire. In emergency, the lamp has a high 180 lumens output.

The Cine-Lite luminaires are constructed in black epoxy coated galvanised steel and are designed to reduce unwanted light emission. This makes it suitable for many applications, such as theatres, cinemas, school halls and discos.

The black opaque exit legend is hidden unless illuminated, making it not just ideal for exit directions, but also customised warnings only applicable under certain conditions, for example 'Do Not Enter'.

The luminaire fully complies with EN60598.2.22. Please note, the legend/pictogram itself is **not** compliant to BS 5499 Pt 4 or ISO 7010. Ultimately the premises where these Exit signs are fitted need to meet the requirements of the Regulatory Reform (Fire Safety) Order 2005 which is done by carrying out a fire-risk assessment. If the responsible person doing this risk assessment decides that a green on black sign is acceptable because of the reduced light levels in a particular area, then as long as this is documented and regularly reviewed this would mean that the premises is deemed to meet the requirements of the Order.

The luminaire fully supports all of the features of the LuxIntelligent range of emergency lighting test panels.



Features

- Low light emissions when not required
- Complies with EN60598.2.22
- Fully supports LuxIntelligent testing panels

Specification

Supply voltage	230Volt (220-240V) @ 50Hz
Supply current	Maintained:90mA
	Non-maintained:40mA
Lamp	8 Watt T5
Battery	3.6V 4AHr NiCd (250mA nominal charge current)
Recharge period	24 Hours (14 hours for 1 hour duration)
Cable entry	Back BESA entry
IP rating	IP20
Construction	Epoxy coated galvanised steel with polycarbonate legend
Dimensions (mm)	385 x 185 x 71 (L x W x H)

Order Codes and Options

NLS8/M3/P-H:	Cine-Lite 8W 3 hour single-sided maintained addressable luminaire
NLS8/M3/P-H/AU:	Cine-Lite 8W 3 hour maintained luminaire with arrow up legend
NLS8/M3/P-H/AL:	Cine-Lite 8W 3 hour maintained luminaire with arrow left legend
NLS8/M3/P-H/AR:	Cine-Lite 8W 3 hour maintained luminaire with arrow right legend

NLS8/NM3/P-H:	Cine-Lite 8W 3 hour non-maintained luminaire with arrow down legend
NLS8/NM3/P-H/AU:	Cine-Lite 8W 3 hour non-maintained luminaire with arrow up legend
NLS8/NM3/P-H/AL:	Cine-Lite 8W 3 hour non-maintained luminaire with arrow left legend
NLS8/NM3/P-H/AR:	Cine-Lite 8W 3 hour non-maintained luminaire with arrow right legend