MxPro5

Damper Interface Card

The Advanced Damper Interface is a loop driven device that utilises the Apollo protocol. The device is a fully monitored interface providing confirmation of the damper open and closed positions.

For use with dampers that are normally held open. Fail-safe operation only applicable to electrically opened & mechanically closed dampers.

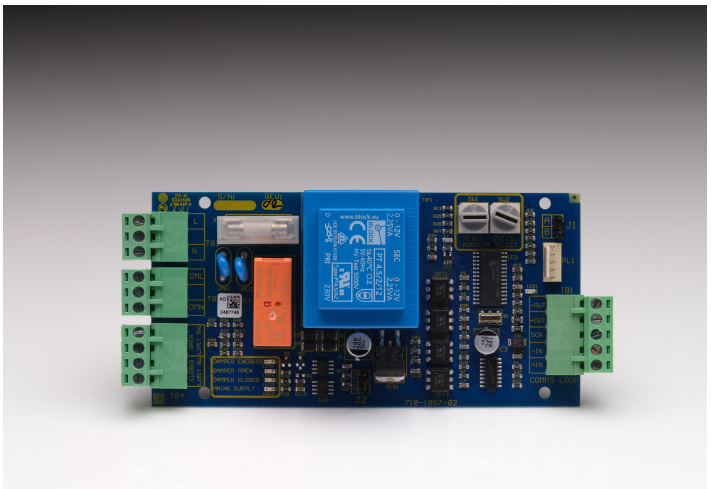

Features

- Damper motor drive and limit switch monitoring integrated into a single unit
- Dual limit switch inputs for confirmation of damper-fully-open, and damper-fully-closed positions
- Selectable monitoring on switch inputs to prevent short circuits in the wiring from giving false position readings
- Fail-safe options in case of data errors in the communications loop

Specification

Enclosure Dimensions H x W x D mm	300 x 200 x 150 - Steel IP66
Colour	RAL 7032 Light Grey
Weight	4Kg
PCB Dimensions H x W x D mm	35 x 142 x 70
Operating Temperature	-5°C to 40°C
Realative Humidity	95% non-condensing (maximum)
Mains Supply	230V AC, 50Hz (+10%,-15%), 30mA (plus motor load)
Motor Switch Rating	1.0A
Fuse (PCB)	T3.15H250V
Fuse (Fuse terminal block)	T3.15H250V
Data loop current	1.6mA

Order Codes and Options

MXP-046:	Damper Interface Card
MXP-046-BX1:	Damper Interface Boxed

Compatibility

Use with dedicated damper panels using Apollo protocol devicesMxPro 5series fire panels require version 050-05a (or higher) program to use with Apollo protocol devices PC configuration program must be 6.20 (or higher) to support damper interface units.

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000 E: enquiries@advancedco.com
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.