
Axis EN Manual Call Point

The Axis EN Manual Call Point is compatible with all fire control panels utilising a fully digital Axis EN protocol.

The call point is smooth and quick to install thanks to the easy wiring design and the front operating element that snaps into place requiring no additional tools.

The call point benefits from improved levels of visibility thanks to a reflective polyester flag at the bottom of the operating face and a brightly illuminated LED ring in the centre of the active area which allows the alarm condition to be viewed over a wide angle of 170 degrees. The alarm flag indicator can be easily reset using the call point key provided, making the call point ready for immediate re-use.



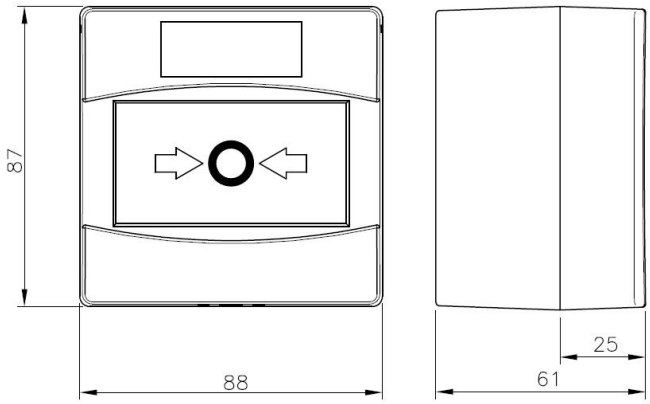

Features

- Fully compatible with the Axis EN range
- Digital communications protocol
- Built-in short circuit isolator
- High visibility of the alarm condition through LED indication
- Resettable operating element
- Waterproof variant available
- Optional protective cover
- Yellow variant available (please note yellow variant is not EN54-11 compliant)
- 3 years standard product warranty

Standards and approvals

- EN54-11 manual call points
- EN54-17 short circuit isolators
- DoP: ACP

Specification

Loop voltage range	18 to 40 Vdc
Average standby current	35 µA @24 Vdc
LED Current Consumption	6mA @24 Vdc
Dimensions (H x W x D)	87 mm x 88 mm x 61 mm
Weight	160 g
Temperature range	-10°C to +55°C
Max tolerated humidity (non condensing)	93% RH
IP rating	42

Order Codes and Options

Axis-CP	Axis EN Intelligent Manual Call Point (RED)
Axis-CP/Y	Axis EN Intelligent Manual Call Point (Yellow)
Axis-CPCI	Transparent Cover for Axis-CP (no text)
Axis-CPKEY	Spare Reset Key for Axis EN Call Point
Axis-CPFMP	Wall Flush Mount Plate with external Frame (RED) for Axis-CP

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000 E: enquiries@advancedco.com
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.

Axis EN Waterproof Manual Call Point

The Axis EN Waterproof Manual Call Point has been designed to withstand difficult environmental conditions such as rain, high humidity or dust.

It combines the features of the standard call point with a rugged weather-sealed moulded enclosure, providing optimum performance even in harsh conditions (IP67 sealed). It is compatible with all fire control panels utilising the Axis EN fully digital communication protocol. The innovative light pipe design allows the alarm condition to be viewed over a wide angle (170 degrees).

The extended housing with symmetrical fixings on the front face of the unit contributes to its physical protection and reliable operation. The rear surface mount box is designed for a simple installation, providing a selection of securing positions together with a choice of cable entries.




Features

- Waterproof operation
- Fully compatible with the Axis EN range
- Digital communications protocol
- Built-in short circuit isolator
- High visibility of the alarm condition through LED indication
- Resettable operating element
- Optional protective cover
- 3 years standard product warranty

Standards and approvals

- EN54-11: Manual call points
- EN54-17: Short circuit isolators
- DoP: AWCP

Dimensions

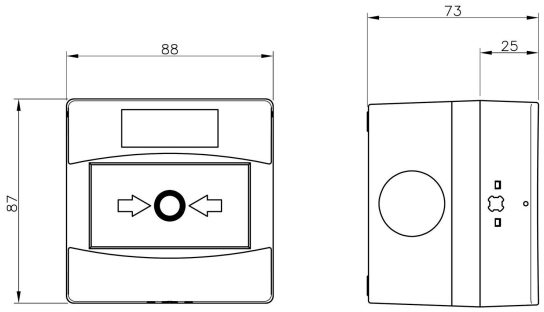

Specification

Loop voltage range	18 to 40 Vdc
Average standby current	35µA @ 24 Vdc
Dimensions of device (H x W x D)	87 mm x 88 mm x 73 mm
Weight	230 g
Temperature range	-10°C to +55°C
IP Rating	67
Max tolerated humidity (non-condensing)	95% RH

Order Codes and Options

Axis-WCP	Axis EN Waterproof Call Point
Axis-CPCI	Transparent Cover for Axis-CP (no text)
Axis-CPKEY	Spare Reset Key for Axis EN Call Point

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000 E: enquiries@advancedco.com
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.

Axis EN

Weatherproof Callpoint Housing

The Axis EN Weatherproof Call Point Housing is a tough protective cover that can be installed with all of the wireless or wired call points from the Axis EN product range.

The hinged polycarbonate housing upgrades any Axis EN call point to a weather-proof rated device, and has been designed and engineered to provide outstanding protection from environmental conditions, vandalism, accidental damage or misuse.

This tough yet aesthetically pleasing cover can be used in a wide variety of applications including off-shore projects, the food and beverage industry, swimming pools and leisure centres, and underground installations. It is also suitable for retrofits and is available with an optional battery powered 90dB tamper alarm.



Features

- Easy and fast installation
- Optional 90 dB tamper alarm
- Breakseal to increase visible deterrent from misuse
- Spacers for surface and flush installations
- Reduces unwanted alarms
- Provides environmental and mechanical protection
- Simple retro-fit to existing installations
- Suitable for all Axis EN call points
- Weatherproof to IP65

Standards and approvals

- EN 60529:1992+A2:2013: IPX5 Water Ingress

Specification

Tamper alarm level	90 dB
Housing material	Polycarbonate
Tamper alarm battery life	3 years
Weight	426 g
Dimensions	190 x 119 x 80 mm

Order Codes and Options

WHCP-BBR	Weatherproof call point housing
RP-RD2-01	Resettable Manual Callpoint
STI-RP-K	Reset Key

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000 E: enquiries@advancedco.com
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.