Axis EN

Mimic Relay Card - obsolete

The Peripheral Relay Card provides 10 30V DC, 1A programmable relay outputs.

The Peripheral Relay Card connects directly to any of the DIL connectors of either the Network Mimic 100 LED Output Card or the Multi way Input/Output Card unit via the supplied ribbon cable.

Each output follows the cause-and-effect programming of the mimic unit output.

This can be either a simple zone output or can be an individually programmed output group rule utilising the full range of features of theMxPro 5 and Axis EN dynamic zoning facilities.

Applications

These units can be used where many relay outputs are required for simple on/off signalling or control.

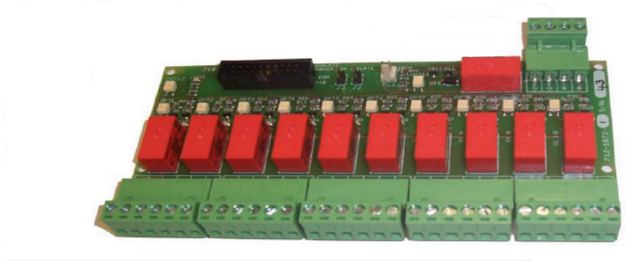

Features

- Ten change-over contacts outputs at 30Vdc, 1A
- DIN rail or screw fixing options
- Seperate isolate input (disables all outputs)
- Seperate isolate indication output
- Fast response

Specification

Enclosure Dimensions H x W x D mm	PCB: 90 x 160 x 15
Enclosure Dimensions H x W x D mm	DIN rail: 90 x 160 x 40
DIN rail	Module mounts onto 32mm G Section and 35mm top hat (En50022) DIN rail
PCB Dimensions H x W x D mm	35 x 142 x 70
Operating Temperature	-5°C to 40°C
Relay Contacts	10 volt free change over contacts
Contact Rating	30V DC, 1A resistive
Power Supply (Card)	24v DC nominal (21-28V DC)
Current (@24V DC)	Quiescent: 0mA, relay on:13mA (per relay)
LED Indication	Relay circuit on (per relay)
Disable Control Inputs	Volt free input and mimic output drive option
Disable Indication	Open collector output

Order Codes and Options

Mxp-052:	Mimic driven 10 way relay card
Mxp-052-DIN:	Mimic driven 10 way relay card in DIN rail carrier

Compatibility

Can be used with any of the network mimic units or the multi-way Input/Output card

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000 E: enquiries@advancedco.com
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.