
MxPro 5

# Loop Driver Cards

The Loop Driver Card is designed for use with the MxPro 5 range of analogue addressable panels. It provides control and connection to detector loops.

The Loop Driver Card Mxp-568 can be used with Apollo, Hochiki or Argus Vega protocols.

The Loop Driver Card Mxp-567 can be used with the Nittan protocol.

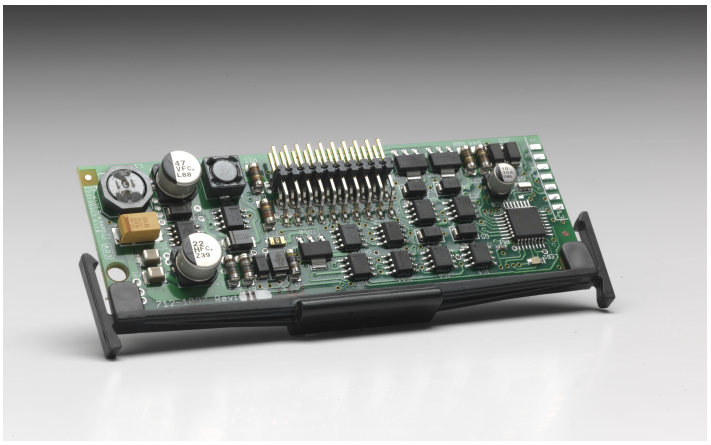

## Features

- Use with MxPro 5 analogue addressable panels
- Mxp-568 is compatible with Apollo, Hochiki and Argus Vega protocols
- Mxp-567 is compatible with Nittan protocol

## Specification

| | |
|---|---|
| Power Supply | 24V DC |
| Protocols | Apollo XP95, Discovery, Soteria / Hochiki ESP / Argus Vega / Nittan Evolution |
| Devices per Loop (maximum) | Apollo (Soteria) 254 detector/call points per loop<br>Apollo (XP95 & Discovery) 126 detector/call points per loop<br>Hochiki 127 detector/call points per loop<br>Argus 240 detector/call points per loop<br>Nittan 249 detector/call points per loop |
| Loop Current | 500 mA max |

## Order Codes and Options

| | |
|---|---|
| MXP-568 | Loop Driver Card - Apollo (XP95, Discovery, Soteria), Hochiki ESP and Argus Vega |
| MXP-567 | Loop Driver Card - Nittan |

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000 E: enquiries@advancedco.com
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.