

Axis EN Waterproof Manual Call Point

The Axis EN Waterproof Manual Call Point has been designed to withstand difficult environmental conditions such as rain, high humidity or dust.

It combines the features of the standard call point with a rugged weather-sealed moulded enclosure, providing optimum performance even in harsh conditions (IP67 sealed). It is compatible with all fire control panels utilising the Axis EN fully digital communication protocol. The innovative light pipe design allows the alarm condition to be viewed over a wide angle (170 degrees).


The extended housing with symmetrical fixings on the front face of the unit contributes to its physical protection and reliable operation. The rear surface mount box is designed for a simple installation, providing a selection of securing positions together with a choice of cable entries.



Features

- Waterproof operation
- Fully compatible with the Axis EN range
- Digital communications protocol
- Built-in short circuit isolator
- High visibility of the alarm condition through LED indication
- Resettable operating element
- Optional protective cover
- 3 years standard product warranty

Dimensions

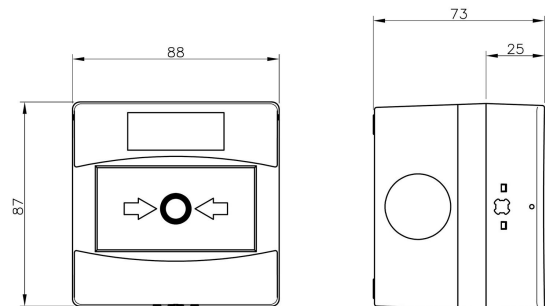

Standards and approvals

- EN54-11: Manual call points
- EN54-17: Short circuit isolators
- DoP: AWCP

Specification

| | |
|---|-----------------------|
| Loop voltage range | 18 to 40 Vdc |
| Average standby current | 35µA @ 24 Vdc |
| Dimensions of device (H x W x D) | 87 mm x 88 mm x 73 mm |
| Weight | 230 g |
| Temperature range | -10°C to +55°C |
| IP Rating | 67 |
| Max tolerated humidity (non-condensing) | 95% RH |

Order Codes and Options

| | |
|------------|---|
| Axis-WCP | Axis EN Waterproof Call Point |
| Axis-CPCI | Transparent Cover for Axis-CP (no text) |
| Axis-CPKEY | Spare Reset Key for Axis EN Call Point |

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000, E: enquiries@advancedco.com,
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.