


## AX-MDM Module

The AX-MDM, 24 VDC Modem Module, provides remote telephone dial-in access to an Axis AX Series Intelligent Fire Alarm Control Panel, so qualified and trained Advanced fire alarm technicians can monitor, maintain and perform service requirements of various Axis AX Series installations. The remote access to the Axis AX Series Intelligent Fire Alarm Control Panel is accomplished with the Advanced Axis AX terminal dial-up (Virtual Terminal Software).

The AX-MDM can be mounted either inside the Axis AX Series Intelligent Fire Alarm Control Panel enclosure or mounted in its own enclosure located adjacent to the Axis AX Series Intelligent Fire Alarm Control Panel.

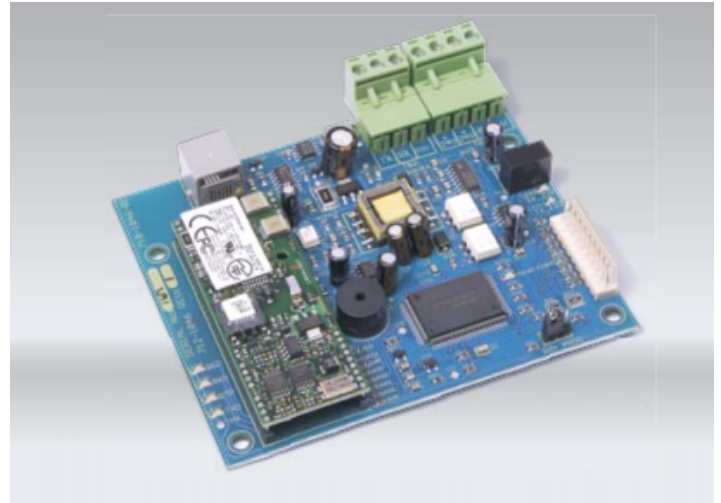

### Features

- Remote Dial-Up Access to Axis AX Series Panels
- Operates on 24 VDC with Battery Backup
- Permits use of Axis AX Virtual Terminal Software
- Mounts within Axis AX FACP or Remotely


### Listings and Approvals

- ETL ANSI/UL 864 Listed: 3118002NYM-001B
- CSFM Approved: 7165-1713:0101
- NYCFCO COA #6080

### Specification

|                              |                                                   |
|------------------------------|---------------------------------------------------|
| Operating Voltage            | 15-30 VDC (From base card or Listed power supply) |
| Operating Current            | 100 mA                                            |
| Environment                  | Indoor, Dry                                       |
| Operating Temperature        | 32-120° F (0-48° C)                               |
| Humidity                     | 10-95% (Non-condensing)                           |
| Weight (AX-MDM)              | 3 oz                                              |
| Optional Enclosure Dimension | 8.58" x 11.81" x 1.77"                            |

Wiring Diagrams

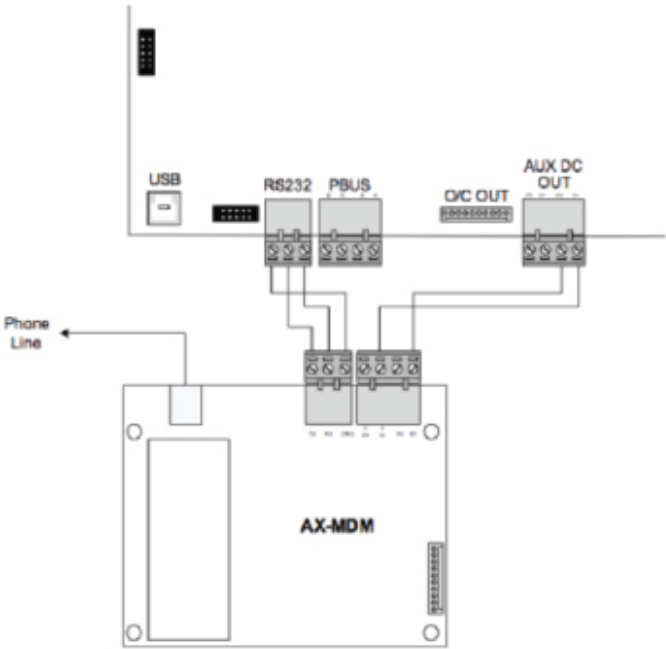

Order Codes and Options

|          |                           |
|----------|---------------------------|
| AX-MDM   | 24 Volt DC, Modem Module  |
| AXM-009* | Optional Listed Enclosure |

\*For gray enclosure, add the suffix "G" to the part number.

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK **T:** +44 (0)345 894 7000 **E:** [enquiries@advancedco.com](mailto:enquiries@advancedco.com)  
**W:** [www.advancedco.com](http://www.advancedco.com)

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.