

Axis^{AX}

City Tie Module

The AX-CTY, City Tie Module, is an interface module that allows the Axis AX Series Intelligent Fire Alarm Control Panel, via a dedicated notification appliance circuit, to control and monitor a Local Energy Masterbox. When properly connected, supervision of all wiring is provided along with all the necessary power to trip the Masterbox coil.

The compact designed AX-CTY, connects to any Axis AX Series dedicated notification appliance circuit (AX-LPD/AX-NAC [internal panel NACs] or SLC loop external NAC module). The module may be installed in a standard electrical box with or without the SLC loop external NAC module.



Features

- ANSI/UL 864 Listed
- Supervised Masterbox Trip Circuitry
- Superior Transient Protection
- NAC Circuit Interface
- Compact, Design
- Standard Electrical Box Mount
- Supports DynamiX I/O Relationship Programming
- Optional Disconnect Switch w/LED Status


Listings and Approvals

- ETL ANSI/UL 864 Listed: 101564744NYM-001
- CSFM Approved: 7165-1713:0101
- NYCDF COA #6105A2

Specification

Operating Voltage	18 - 28 VDC
Operating Current	
Quiescent	0 mA
Alarm	0.5 A (Max) for less than 1/2 a Second
Operating Temperature	32 °F-120 °F (0 °C-48 °C)
Environment	Indoor, Dry
Humidity	10-95% (Non-condensing)
Dimensions	1/2 " H x 1" W x 8 1 / 2 " L (Includes wire length)
Weight	0.8 oz

Wiring Diagram

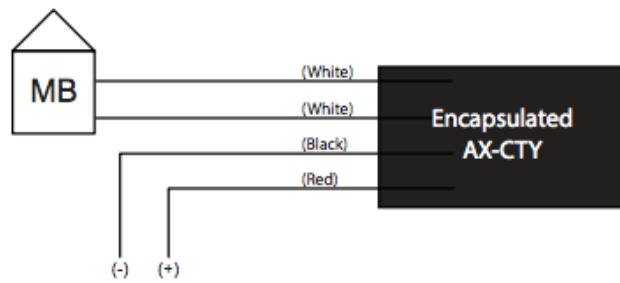

To Notification
Appliance Circuit

* Must be connected to a
dedicated non-silenceable
NAC circuit, programmed to
activate on general alarm.

Order Codes and Options

AX-CTY

City Tie Module

Check if this document is up to date | Give us feedback

9564 Yellowhead Trail NW, Edmonton AB, T5G 0W4, Canada T: 1 (866) 462-7100 E: info@harding-tech.com W: www.harding-tech.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.